



# PRODUCT CATALOGUE

The Vehicle Lighting Specialists

## 2025



# Table of Contents



**1. Driving & Work Lighting**

LED Driving Lights	6-13
LED Driving Bars	28-21
LED Headlights	22-41
LED Tractor & Universal Worklights	42-57

**2. LED Warning Lighting**

LED Strobes	68-76
LED Beacons	77-86
LED Warning Roof Bars	87-90
Beacon Brackets	91 - 92

**3. LED Tail Lighting**

LED Marker Lights	93-101
LED Interior Lighting	102-103
LED Tail Lights	104-113

**4. LED Bulbs**

LED Bulbs	114-117
-----------	---------

**5. LED Torches**

LED Torches and Hand Lights	118-121
-----------------------------	---------

**6. LED Camera Systems**

Camera Systems	122-126
----------------	---------

**7. Parts & Equipment**

Plugs and Sockets	127-128
Parts and Equipment	129



# LEDGLOBAL OUR STORY

Founded in 2015 in Ireland, LED Global has established itself as a premier brand in LED lighting solutions, catering to various sectors, including Agriculture, Automotive, Construction Equipment, Forestry, and Mining. Since our inception, our brand and product range have significantly expanded, paralleling the growth of our customer base, which now extends across the UK and various European countries.

In 2023, we embarked on a new chapter with the inauguration of our new offices and a state-of-the-art distribution centre in Frankfurt, Germany. This strategic location enhances our logistical capabilities, ensuring faster and more cost-effective delivery to our mainland European customers. Our dedicated sales and customer service team, based in Frankfurt, is committed to providing exceptional support to our clients, ensuring their needs and satisfaction are always our top priority.

**LED** GLOBAL



**LED** Global delivers **premium,**  
industry-tailored **lighting solutions**



## Why Choose Us

LED Global stands out from the competition by offering a wide range of high-quality products and a wealth of experience in product development across our target industries.

We offer an expansive OEM cross-reference database for our tractor lighting, simplifying the selection process for our customers.

Our products feature plug-and-play connectors, mirroring original equipment specifications to facilitate easy installation without requiring extensive technical skills. This design philosophy saves time and reduces costs for our customers.

At LED Global, we are committed to continuous innovation, staying ahead of technological advancements to develop products with brighter illumination and lower power consumption.

Our recent innovations include integrating LED warning flashers into driving lights and bars, enhancing value and safety for our users.



# New Arrivals


## Driving Lights

Driving lights, high-intensity auxiliary lights, enhance visibility and safety in nighttime or adverse driving conditions. With a focused beam, they illuminate the road, alerting drivers to hazards and boosting confidence in challenging environments.

# LG986

## 9 inch LED Driving Light with Dual Colour Position

Experience superior visibility, Enjoy a clear, bright light with a 5700K color temperature and 8000 lumens of output. The robust PC lens and 144W power ensure exceptional performance.



Specifications
• Operating voltage: 10 to 30 volts
• IP rating: 68
• Color temperature: 5700 Kelvin
• Lens material: PC
• Certifications: CE, ROHS, R148, R10
• Wattage: 144 watts
• Lumen: 8000
• Size: 212 x 81 millimeters

# LG987

## 7 inch LED Driving Light with Dual Colour Position



Specifications
• Operating voltage: 10 to 30 volts
• IP rating: 68
• Color temperature: 5700 Kelvin
• Lens material: PC
• Certifications: CE, ROHS, R148, R10
• Wattage: 108 watts
• Lumen: 5000
• Size: 178 x 71 x 165 millimeters
• LED type: OSRAM






# LG877


## 9 inch LED Driving Light with Dual Colour Position & Amber Warning Strobe

Introducing our 9" LED Driving Light, a versatile solution for all your driving needs. Featuring dual-colour position lighting and an amber warning strobe, this powerful light enhances visibility and safety in all conditions. Whether you're navigating dark roads or signaling a hazard, this driving light offers unmatched performance and reliability.



### Specifications


- E marked (E8, ref. 37,5), ECE R112 / R10 / R7 (white position light)
- EMC secured (does not disturb the radio)
- With position light (4 LEDs) yellow-orange or xenon white  
(connect the colour you want)
- 12000 lumens (theoretical), 9600 lumens (actual)
- TIR Optical system (Total Inner Reflection)
- 120 W (12 x 10 W Cree XM-L2 LED)
- 4 pcs LED for strobe light
- Nominal power 92,4 W
- IP68 (water/dust proof)
- 6 pole DT connector (6-pin adapter included)
- Electronic heat management
- Voltage 9-36 V
- Load 7,7 A@ 12V and 3,6A@24 V
- Width: 218 mm, Height: 234,5 mm (incl bracket), Depth: 68,5 mm
- Weight: 1,9 kg / Cable length: 650 mm

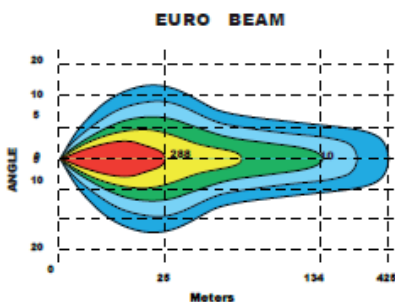




# LG876

## 7 inch LED Driving Light with Dual Colour Position Light




Specifications
• 9 - 36 Volts
• 60 Watt
• 6000 Lumen
• White or Amber Position Light
• Size: 180 x 190 x 67.5mm
• Die Cast Aluminium Alloy Housing
• EMC Protected Class 5
• Unbreakable PC Lens
• ECE R10, ECE R149 (R112) ECE R148 (ECE R7)




# LG930

## 9 inch LED Driving Light with Dual Colour Position Light



Specifications
• 9 - 36 Volts
• 120 Watt
• 12000 Lumen
• 4 x 20 Watt & 4 x 10 Watt LEDs
• White or Amber Position Light
• Size: 218 x 233 x 84mm
• Die Cast Aluminium Alloy Housing
• EMC Protected Class 5
• Unbreakable PC Lens
• ECE R10, ECE R149 (R112) ECE R148 (ECE R7)



# LG931

## 9 inch round LED driving light with dual colour position light

Enhance your driving experience, With a sleek smoked lens design, electronic temperature optimization, and comprehensive certifications, it's designed for peak performance and reliability.

 **160W**    
  **9-36V**    
  **9600 LUMENS**


 **IP68**    
  **NEW SMOKED LENS**

### Specifications

- Power: 160Watt
- Voltage: 9-36V
- Lumens: 9600
- Ingress Protection: IP68
- Certifications: ECE R10, ECE R149, ECE R148, ECE R65
- Position Light: White or amber
- Size: 218mm x 233mm x 84mm
- EMC Protection: Class 5
- Driving Beam: TIR reflectors providing a wide and long light pattern, reaching up to 480 meters at 1 Lux
- Amber Warning Strobe: ECE R65 approved
- Flash Patterns: Five different selectable flash patterns for the warning strobe
- Temperature Optimization: Electronic control for stable performance
- Lens: New smoked lens design



EURO BEAM

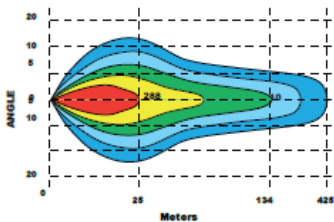

# LG827

## 7 inch round 100 Watt LED Driving Light with White Position Light & Amber Strobe




### Specifications

- DC 9 - 36 Volts
- Over/Under Voltage Protection
- White Position Light
- Amber Strobe Function
- 10920 Lumen
- ECE R 10, ECE R149, ECE R148, R65
- Size: 189.5 x 71.2mm
- EMC Cisprr 25 Class 4
- Complies with IP68
- Main Beam: 100 Watt
- Position Light: 3.5 Watt



**WHITE POSITION LIGHT**

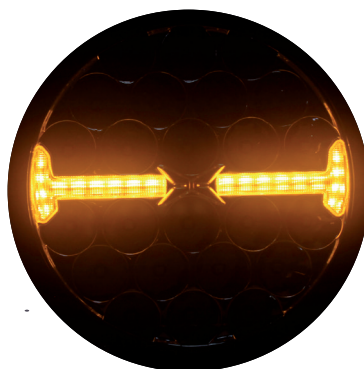

**AMBER STROBE FUNCTION**



# LG888


## 10 inch oval 60 Watt LED Jumbo Driving Light with Dual Colour Position Light

This Driving Light is manufactured using 12 high-intensity LEDs, each generating 4 Watts of power.

Its voltage range of 12-24 volts mean that it is compatible with all vehicles.

The lamp is manufactured to the highest standards and has full certification to match such as ECE R10, R112, and R7, along with EMC CISPR 25 Class 5.

The lights housing is constructed from graphene, an exceptional thermal and electrical conductor that is corrosion-resistant. The lens is crafted from UV-resistant and scratch-resistant Polycarbonate, ensuring clarity and durability. The stainless steel mounting bracket ensures a secure installation. This spotlight is built to withstand the test of time.



### Specifications

- Power: 48 W Driving Beam
- Light output: 3000 lumens
- Colour temperature: 5700-6500K
- Current at 24 V: 1.16-1.25 A, 0.025 A position light
- Number of LEDs: 12 x 4W high beam, 7 x 0.5 position light
- Water resistance: IP69K
- Light distance: 275 m @ 1 lux
- Lens: polycarbonate
- Housing: graphene
- Mounting: stainless steel bracket/M10 bolt/2m cable
- Size: 244 x 138.4 x 110mm
- Certification: ECE R10, R112 ref25 and R7, EMC CISPR 25 Class 5






# LG932

10 inch oval LED driving light X Range with dual colour position light and amber strobe.



## Specifications

- E markevd (E8, ref. 37,5), ECE R112 / R10 / R7 (white position light)
- EMC secured (does not disturb the radio)
- With position light , yellow-orange or xenon white
- 10000 lumens (theoretical), 9600 lumens (actual)
- TIR Optical system (Total Inner Reflection)
- 120 W (4 x 25 W Cree XM-L2 LED) (2 x 10 Watt Position Lights)
- 4 pcs LED for strobe light
- Nominal power 92,4 W
- IP68 (water/dust proof)
- 6 pole DT connector (6-pin adapter included)
- Electronic heat management
- Voltage 9-36 V
- Load 7,7 A @ 12 V and 3,6 A @ 24 V
- Width: 247 mm , Height: 176 mm (incl bracket) ,Depth: 92 mm
- Cable length: 650 mm

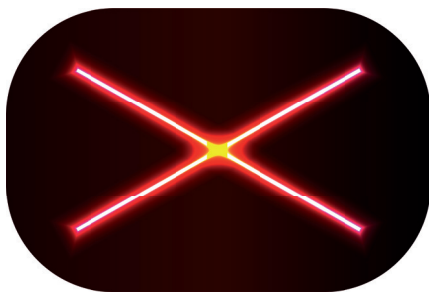

## NEW X - RANGE

Featuring a striking X-shaped DRL position light design. Enhance your vehicle's style and visibility with this innovative lighting solution.













# LG933

## 10 inch 120 Watt Oval LED Driving Light with Dual Colour Position & Amber Warning Strobe


This Driving Light has four strong LEDs as position lights and allows you to choose between Xenon White or Amber Colour. The light has a combined light pattern, meaning that it both scatters light in a wide area close to the vehicle, but also focuses light far away. This beam pattern is ideal if you want a lot of light near the vehicle for the smaller roads but still have the length to light up the road far ahead.

 <b>120W</b>	 <b>9-36V</b>	 <b>9600 LUMENS</b>	 <b>IP68</b>
 <b>NEW SMOKEDLENS</b>	 <b>4X</b>	 <b>EMC</b>	 <b>AMBER WARNING STROBE</b>

### Specifications

- E marked (E8, ref. 37,5), ECE R112 / R10 / R7 (white position light)
- EMC secured (does not disturb the radio)
- With position light , yellow-orange or xenon white
- 10000 lumens (theoretical), 9600 lumens (actual)
- TIR Optical system (Total Inner Reflection)
- 120 W (4 x 25 W Cree XM-L2 LED) (2 x 10 Watt Position Lights)
- 4 pcs LED for strobe light
- Nominal power 92,4 W
- IP68 (water/dust proof)
- 6 pole DT connector (6-pin adapter included)
- Electronic heat management
- Voltage 9-36 V
- Load 7,7 A @ 12 V and 3,6 A @ 24 V
- Width: 247 mm , Height: 176 mm (incl bracket) ,Depth: 92 mm
- Cable length: 650 mm

#### DRIVING BEAM





# Experience Excellence

From concept to distribution, our meticulous production process ensures that every product meets the highest quality standards. Trust LED Global for lighting solutions that combine innovation, durability, and superior performance.

**Brighten Your Path with LED Global—Lighting  
Solutions That Lead the Way.**



# DOUBLE ROW SERIES

## LED Driving Bars

Discover our range of Driving Bars, available in various sizes to fit your needs. Equipped with both amber and white position lighting, these driving bars enhance visibility and safety in all driving conditions. Whether you're on a rugged off-road adventure or navigating city streets, our driving bars provide superior illumination and reliability.





# LG990

## 14 inch Driving Bar

Introducing the 14-inch Driving Bar, designed for ultimate performance and reliability. This high-powered light bar delivers exceptional brightness with a sleek TIR optical system and offers versatile position lighting in yellow-orange or xenon white. Built to withstand harsh conditions with IP68-rated protection and advanced electronic heat management, it ensures uninterrupted operation.



120W



10-30V



7000  
LUMENS



IP68

### Specifications

- Operating voltage: 10 to 30 volts
- IP rating: 68
- Color temperature: 5700 Kelvin
- Lens material: PC
- Certifications: CE, ROHS, R148, R10
- Wattage: 120 watts
- Lumen: 7000
- Size: 357 x 67 x 70 millimeters
- Additional Information: Dynamic startup in the DRL

DYNAMIC START-UP



Our Driving Light Bar features a unique dynamic startup, mimicking the iconic Knight Rider motion. Position these light bars in series for optimal performance and a touch of cinematic flair. Illuminate your journey like never before!



Choice of White  
or Amber  
Position Light





# LG997

## 22 inch Driving Bar




Introducing the 22-inch Driving Bar, designed for ultimate performance and reliability. This high-powered light bar delivers exceptional brightness with a sleek TIR optical system and offers versatile position lighting in yellow-orange or xenon white. Built to withstand harsh conditions with IP68-rated protection and advanced electronic heat management, it ensures uninterrupted operation.

*Choice of White or Amber Position Light*

-   
**200W**
-   
**10-30V**
-   
**10000**  
LUMENS
-   
**IP68**

### Specifications

- Operating voltage: 10 to 30 volts
- IP rating: 68
- Color temperature: 5700 Kelvin
- Lens material: PC
- Certifications: CE, ROHS, R148, R10
- Wattage: 200 watts
- Lumen: 10000
- Size: 560 x 67 x 70 millimeters
- Additional Information: Dynamic startup in the DRL

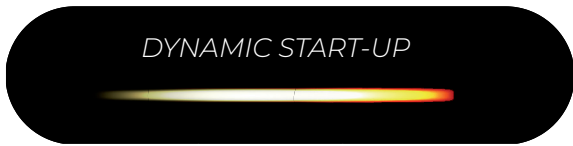

Our Driving Light Bar features a unique dynamic startup, mimicking the iconic Knight Rider motion. Position these light bars in series for optimal performance and a touch of cinematic flair. Illuminate your journey like never before!





# LG992

## 32 inch Driving Bar



Introducing the 32-inch Driving Bar, designed for ultimate performance and reliability. This high-powered light bar delivers exceptional brightness with a sleek TIR optical system and offers versatile position lighting in yellow-orange or xenon white. Built to withstand harsh conditions with IP68-rated protection and advanced electronic heat management, it ensures uninterrupted operation.

*Choice of White or Amber Position Light*



**300W**



**10-30V**



**13500**  
LUMENS



**IP68**

### Specifications

- Operating voltage: 10 to 30 volts
- IP rating: 68
- Color temperature: 5700 Kelvin
- Lens material: PC
- Certifications: CE, ROHS, R148, R10
- Wattage: 300 watts
- Lumen: 13500
- Size: 816 x 67 x 70 millimeters
- Additional Information: Dynamic startup in the DRL



*DYNAMIC START-UP*



Our Driving Light Bar features a unique dynamic startup, mimicking the iconic Knight Rider motion. Position these light bars in series for optimal performance and a touch of cinematic flair. Illuminate your journey like never before!





---

# SUPER SLIM SERIES

---

## LED Driving Bars

The new series of LED Driving Bars incorporate reflector technology in its driving performance, but also in its dual colour position lighting. It is produced with a sleek aerodynamic housing which limits drag while driving.

It is also fitted with a high quality breather filter to limit any build up of condensation within the inside of the housing.

The newest and coolest technology feature of this series is the dual beam function. These bars can be used and have a separate cable for each of the following: driving beam which is ECE road legal certified. It also has an off road feature which at the push of a button will give a brighter and longer distance beam for off road use.



# LG994

## 20.5 inch Slim Driving Bar



### Specifications

- Operating voltage: 10 to 30 volts
- IP rating: 68
- Color temperature: 5700 Kelvin
- Lens material: PC
- Certifications: CE, ROHS, R148, R10
- Wattage: 105 watts
- Lumen: 6000
- Size: 798 x 54 x 40mm
- Additional Information: Dynamic startup in the DRL



DYNAMIC START-UP



105W



10-30V



6000  
LUMENS



IP68

# LG995

## 31.5 inch Slim Driving Bar



### Specifications

- Operating voltage: 10 to 30 volts
- IP rating: 68
- Color temperature: 5700 Kelvin
- Lens material: PC
- Certifications: CE, ROHS, R148, R10
- Wattage: 105 watts
- Lumen: 6000
- Size: 574 x 55 x 40 millimeters
- Additional Information: Dynamic startup in the DRL



DYNAMIC START-UP



105W



10-30V




6000  
LUMENS



IP68



# LG950

11 inch Ultra Slim LED Driving Bar with Dual colour Park Light




## Specifications

- 54 Watt
- 4900 Lumen
- 2 Colour Park Light, White and Amber
- 9 x 6 Watt & 9 x 0.5 Watt LED
- Dimension: 291 x 33 x 70mm

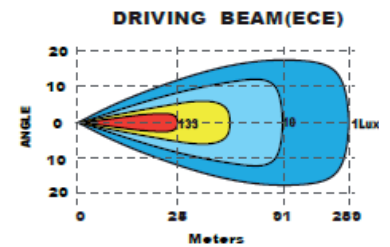



# LG951

21 inch Super Slim LED Driving Bar with Dual Colour Park Light



## Specifications

- 108 Watt
- 9600 Lumen
- Driving Beam (ECE) - 463m at 1 Lux
- 18 x 6 Watt & 18 x 0.5 Watt LED
- Size: 534 x 33 x 70mm

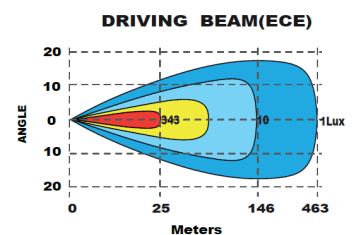



# LG952

30 inch Super Slim LED Driving Bar with Dual Colour Park Light



## Specifications

- 162 Watt
- 14600 Lumen
- Reflector Beam Technology
- 27 x 6 watt LED's & 27 x 0.5 watt LED's
- Dimension: 777 x 33 x 70mm

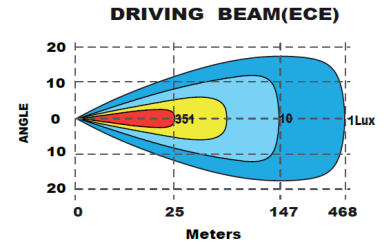



# LG953

40 inch Ultra Slim LED Driving Bar with Dual colour Park Light



## Specifications


- 216 Watt
- 19400 Lumen
- 2 Colour Park Light, White and Amber
- 36 x 6 Watt & 36 x 0.5 Watt LED
- Size: 1020 x 33 x 70mm

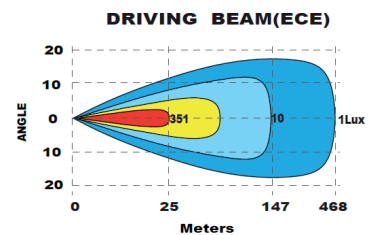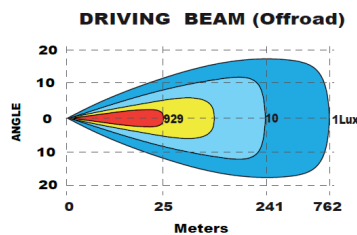



## LED Driving Bars

Discover unparalleled performance with our Super Value Light Bars, designed to deliver exceptional brightness and reliability at an unbeatable price. Perfect for a range of applications, these light bars combine advanced technology with robust construction to enhance your visibility and driving experience. Elevate your vehicle's lighting with our high-quality, cost-effective solution.

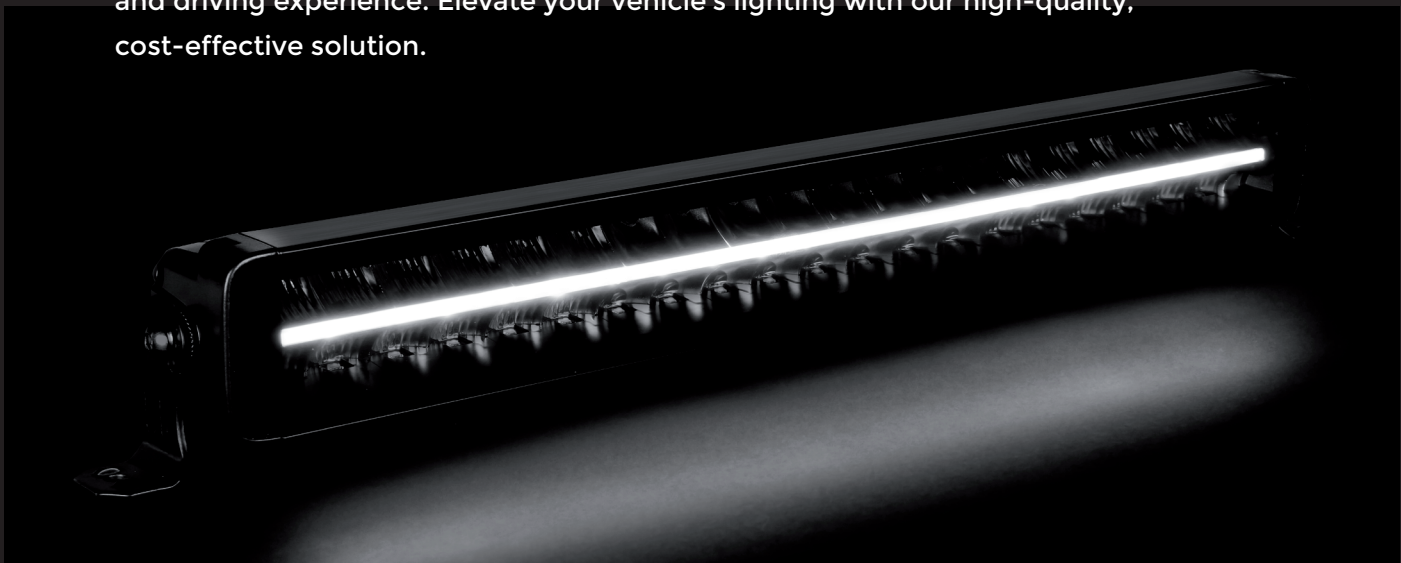



# LG980

12 inch LED Driving Lightbar with Dual Colour Position

## Specifications

- Main Beam: 45 Watt
- Position Light: 4.5 Watt
- OSRAM LEDs
- Voltage 10-30 V
- E-marked: R112 (Driving), R7 (White Position), R10, R148, R149
- EMC CISPR 25 Class 4
- IP67
- Size: 303mm x 69mm x 76.3mm (excl. bracket)
- Weight: 1.4 kg
- Cable Length - 500mm
- Over/Under Voltage Protection
- Range: 300m @1 lux
- 5200 Lumen (Raw), 4000 Lumen (Effective)



Choice of White or Amber Position Light




# LG982

22 inch LED Driving Lightbar with Dual Colour Position

## Specifications

- Main Beam: 95 Watt / Position Light: 8.5 Watt
- OSRAM LEDs -10500 Lumen (Raw), 8000 Lumen (Effective)
- Dual Position Light (White or Amber Colour Choice)
- Voltage 10-30 V
- E-marked: R112 (Driving), R7 (White Position), R10, R148, R149,
- EMC CISPR 25 Class 4
- IP67
- Size: 555mm x 69mm x 76.3mm (excl. bracket)
- Weight: 3kg
- Cable Length 500mm



Choice of White or Amber Position Light



# LG984

## 32 inch LED Driving Lightbar with Dual Colour Position



Illuminate your path with the 32" (800mm) LED Driving Lightbar featuring dual-color position lights. Engineered for powerful performance and enhanced visibility, this lightbar combines cutting-edge technology with sleek design. Whether you're navigating tough terrains or driving in low-light conditions, its advanced features ensure you stay safe and stylish on the road.



140W



10-30V



12000  
LUMENS



IP67



EMC

### Specifications

- Main Beam: 140 Watt / Position Light: 13 Watt
- Voltage 10-30 V
- OSRAM LEDs -Range: 475m @1 lux
- ECE R10
- EMC CISPR 25 Class 4
- IP67
- Range: 475m @1 lux
- 15000 Lumen (Raw), 12000 Lumen (Effective)
- Size: 807mm x 69mm x 76.3mm (excl. bracket)
- Aluminium Casing
- Stainless Steel Side and Back Mount Brackets included
- Polycarbonate Lens
- Weight: 3.5 kg
- Cable Length - 500mm





# LG894

## 20 inch 150 Watt LED Driving Bar with White Position and Amber Strobe

### Specifications

- DC 9 - 36 Volts
- Over/Under Voltage Protection
- Position Light - White
- Amber Strobe Function
- ECE R10, ECE R112, ECE R7, R65
- Size: 514 x 54 x 61.5mm
- EMC Cispr 25 Class 4
- Complies with IP69
- Aluminium Heatsink & casing
- Main Beam: 150 Watt
- Position Light: 3.5 Watt






AMBER WARNING STROBE

# LG828

## 20 inch 96 Watt LED Driving Bar with Dual Colour

### Specifications

- DC 9 - 36 Volts
- Over/Under Voltage Protection
- Position Light - White or Amber
- ECE R10, ECE R112, ECE R7
- Size: 520 x 40.5 x 52.5mm
- EMC Cispr 25 Class 4
- 522m at 1 lux
- Complies with IP69
- Aluminium Heatsink & casing
- Main Beam: 96 Watt
- Position Light: 3 Watt

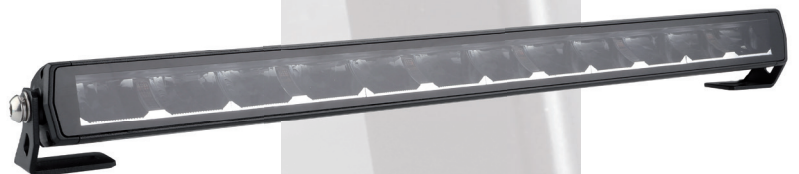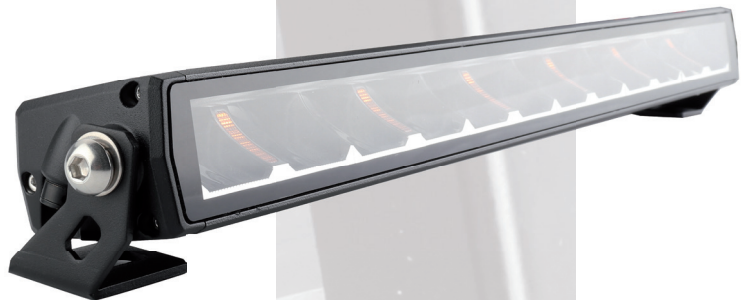

Choice of White or Amber Position Light



# Safety Across

## Headlights

Illuminate your drive with our state-of-the-art Headlights. Engineered for exceptional brightness and clarity, these headlights provide superior visibility in all conditions. With advanced technology and sleek design, they not only enhance your vehicle's appearance but also ensure a safer driving experience.

## LG830

### 40 Watt LED Round Bonnet Work Light

#### Specifications

- 9 - 32 Volts
- Size: 93.5 x 83 x 55mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with H9 Connector
- ECE R10 Approved
- EMC Cspr 25 Class 4




## LG836

### 50 Watt LED Bonnet & Cab Insert Work Light

#### Specifications

- 9 - 32 Volts
- Size: 93.5 x 83 x 55mm
- 4000 Lumen
- Diecast Aluminium Housing
- Supplied with H9 Connector
- ECE R10 Approved
- EMC Cspr 25 Class 4




## LG883

40 Watt Built In LED Work Light for Fendt

### Specifications

- 9 - 32 Volts
- Size: 85 x 85 x 69mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with H9 Plug & Play Connector
- ECE R10 Approved
- EMC Cisp 25 Class 4




## LG889

40 Watt LED Bonnet Work Light

### Specifications

- 9 - 32 Volts
- Size: 84 x 84 x 56.2mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied 9005 Plug & Play Connector
- ECE R10 Approved
- EMC Cisp 25 Class 4



# LG824 (UK/IRL) LG824 (EU)

## 90 Watt LED High & Low Beam Headlight

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt
- Size: 140 x 140 x 79mm
- IP 68
- EMC to CISPR25 Class 4
- Supplied with H4 Plug & Play Conector
- ECE R10 Approved
- ECE R149( R112)
- Diecast Aluminium Housing



90W



9-32V



IP68



EMC



E



driving



# LG892

## 60 Watt LED High Beam Light for John Deere

### Specifications

- High Beam = 60 Watt
- Size: 120 x 171.8 x 103.1mm
- ECE R10, ECE R149 (R112)
- EMC to CISPR25 Class 4
- IP68
- Diecast Aluminium Housing
- Supplied with 9005 Plug and Play Connector



60W



9-32V



IP68



EMC



E



driving



### R&M Series

# LG819

## 90 Watt LED High Low Beam Headlight

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt
- Size: 144 x 166 x 118mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R149( R112) ,
- Diecast Aluminium Housing



90W



9-32V



IP68



EMC



E



driving



# LG885 (UK/IRL) LG885EU (EU)

## 114 Watt LED High & Low Beam Headlight with DRL

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt
- DRL = 24 Watt
- Size: 115 x 108 x 124.6mm
- IP 68
- EMC to CISPR25 Class 4
- Supplied with 9005 & AMP Connector
- ECE R10 Approved
- ECE R149( R112) , ECE R148 (R7)



114W



9-32V



IP68




EMC



E



driving





# LG821 (UK/IRL) LG821EU (EU)

## 18 Watt LED Low Beam Headlight

### Specifications

- High Beam = 18 Watt
- 9 - 32 Volts
- Size: 102 x 102 x 90mm
- ECE R10, ECE R149 (R112)
- EMC to CISPR25 Class 4
- IP68
- Diecast Aluminium Housing



18W



9-32V



IP68



EMC

MASSEY  
FERGUSON

CLAAS

FENDT



# LG822

## 35 Watt LED High Beam Headlight

### Specifications

- High Beam = 35 Watt
- Low Beam = 18 Watt
- Position = 1.6 Watt
- 9 - 32 Volts
- Size: 102 x 102 x 90mm
- ECE R10, ECE R149 (R112)
- Diecast Aluminium Housing



35W



9-32V



IP68




EMC

MASSEY  
FERGUSON

CLAAS

FENDT

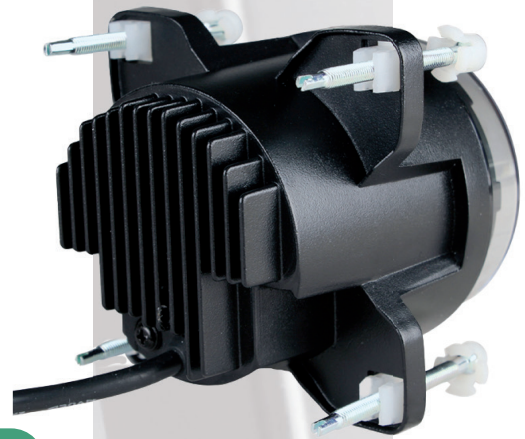

# LG891 (UK/IRL) LG891EU (EU)

## 60 Watt LED Low Beam Driving Light for John Deere

### Specifications

- High Beam = 60 Watt
- Low Beam = 18 Watt
- Size: 112 x 121 x 102mm
- IP68
- ECE R10, ECE R149 (R112)
- EMC to CISPR25 Class 4
- Diecast Aluminium Housing



60W



9-32V



IP68



EMC

JOHN  
DEERE



# LG873

40 Watt LED Bonnet Work Light

## Specifications

- 9 - 32 Volts
- Size 100 x 117 x 77mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



# LG895

40 Watt Built In Work Light for John Deere

## Specifications

- 9 - 32 Volts
- Size: 89 x 108 x 55mm
- 3200 Lumens
- Diecast Aluminium Housing
- Supplied with H9 Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG893 (UK/IRL) - LG893EU (EU)

90 Watt LED Headlight with DRL

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt,
- Size: 127 x 127 x 79mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112
- Diecast Aluminium Housing



## LG832 (UK/IRL) - LG832EU (EU)

96 Watt LED High & Low Beam Headlight with DRL

### Specifications

- High Beam = 60 Watt, Low Beam = 30 Watt
- DRL = 6 Watt
- Size: 112 x 121 x 102mm • IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R149( R112) , ECE R148 (R7)
- Diecast Aluminium Housing





## LG884 (UK/IRL) - LG884EU (EU)

90 Watt LED Headlight & DRL

### Specifications

- 90 Watt
- High & low beam
- Size: 190 x 135 x 91mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148 (R87)
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector
- Suitable for Fiat Tractors




# LG831 (UK/IRL) LG831EU (EU)

**102 Watt LED High & Low Beam Headlight with DRL**

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt, DRL = 12 Watt
- Size: 167 x 107 x 80mm
- 5760 Lumen
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector

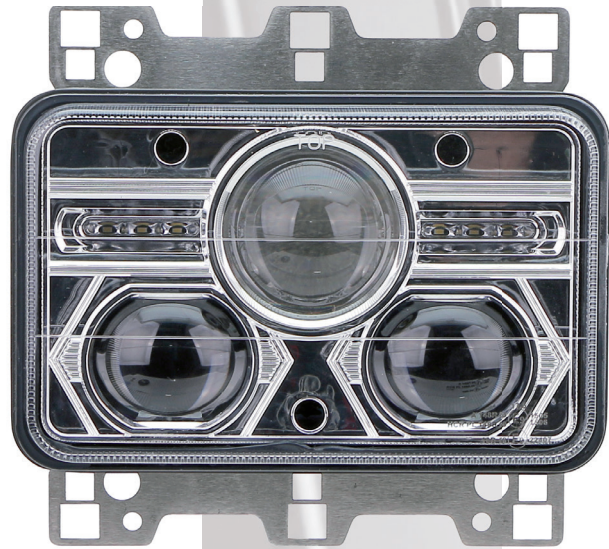

102W



9-32V



IP68



EMC



5760  
LUMENS



driving



# LG837 (UK/IRL) LG837EU (EU)

**102 Watt LED High & Low Beam Headlight with DRL**

### Specifications

- High Beam = 60 Watt
- Low Beam = 30 Watt, DRL = 12 Watt
- Size: 165 x 105 x 80mm
- 5760 Lumen
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148
- Diecast Aluminium Housing
- Supplied with H4 Plug & Play Connector



102W



9-32V



IP68





EMC



5760  
LUMENS



driving




# LG838 (UK/IRL) LG838EU (EU)

**102 Watt LED High & Low Beam Headlight with DRL**

## Specifications

- DC 9 - 32 Volts
- High Beam = 60 Watt,
- Low Beam = 30 Watt, DRL = 12 Watt
- Size: 165 x 105 x 80mm
- 5760 Lumen
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R112 , ECE R148
- Diecast Aluminium Housing

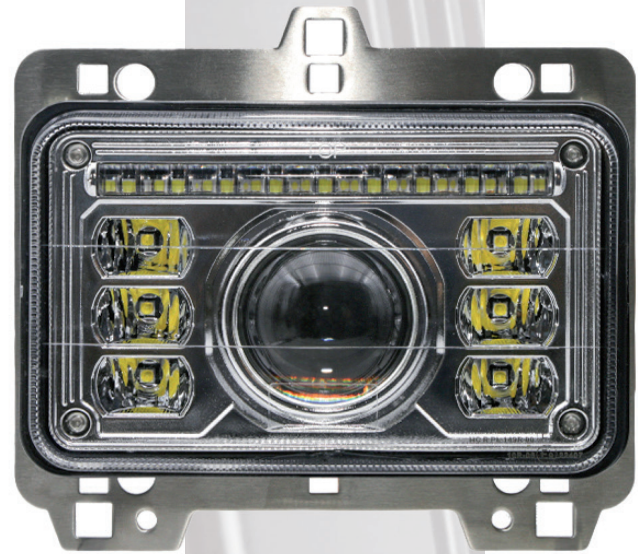

102W



9-32V



IP68



EMC



5760  
LUMENS



driving



# LG874 (UK/IRL) LG874EU (EU)

**62 Watt LED High & Low Beam Headlight with DRL**

## Specifications

- High Beam =30 Watt
- Low Beam = 20 Watt
- Dimensions 157 x 93.5 x 80mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R149( R112) ,
- Diecast Aluminium Housing
- Supplied With H4 Plug & Play Connector



62W



9-32V



IP68




EMC



E



driving



# LG829

## 102 Watt LED High & Low Beam Headlight with DRL

### Specifications

- 102W
- High Beam = 60 Watt, Low Beam = 30 Watt
- DRL = 6 Watt
- Size: 208 x 154 x 118mm
- IP 68
- EMC to CISPR25 Class 4
- ECE R10 Approved
- ECE R149( R112) , ECE R148 (R7)
- Diecast Aluminium Housing



102W



9-32V



IP68



EMC



E



driving




# LG899L

# LG899R

## LED Corner 30W Headlight

### Specifications

- LED Power: 30 Watt Osram LED 5W/PC
- Operating Volt: 10-30 Volt DC
- Light Output: about 2400 Lumen
- Color Temperature: 5700K
- Operation Temperature: -40°C to 80°C
- Waterproof Rate: IP68
- Beam: flood beam
- Material: diecast aluminum housing with 9005 plug
- LENS: PC
- Housing Color: black
- Life Time: about 50,000 hours
- EMC: ECE R10, CISPR25 CLASS 4

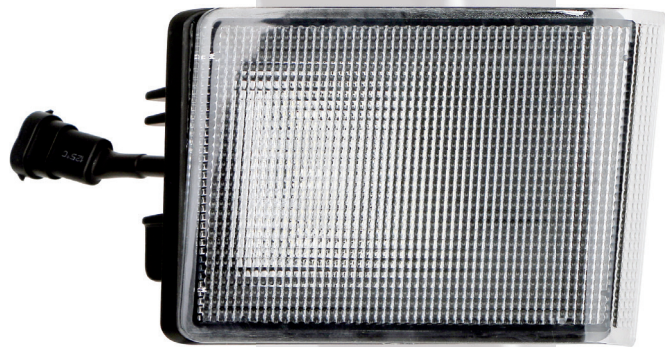

30W



10-30V



IP68



EMC



2400  
LUMENS



# LG817

## Front Position Light with Indicator

Introducing our Front Position Light with Indicator, designed to deliver powerful performance and exceptional visibility. This versatile light combines a bright white flood beam with an amber turn signal, making it perfect for any driving condition. Built to last, it operates efficiently in extreme temperatures and is fully waterproof. With a long lifespan and reliable performance, this light is an excellent addition to your vehicle's lighting system. Upgrade your driving experience with this durable and efficient lighting solution.



24W



9-32V



IP68




driving



EMC



E

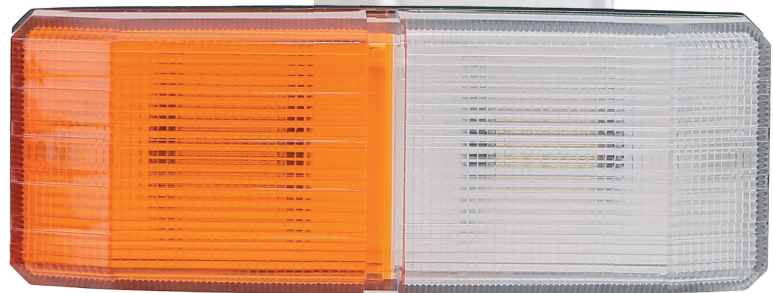

### Specifications

- LED Power: 24W
- Operating Volt: 9-32 Volt DC
- Light Output: about 1900 Lumen
- Color Temperature: 5700K
- Operation Temperature: -40°C to 80°C
- Waterproof Rate: IP68
- Beam: White Flood & Amber Turn Signal
- LENS: PC
- Life Time: about 50,000 hours
- EMC: ECE R10



**LG820L (UK/IRL) - LG820LEU**  
**LG820R (UK/IRL) - LG820REU**

**100 Watt LED Headlight with Indicator & DRL**

Introducing the 100 Watt LED Headlight with Indicator & DRL, designed for exceptional brightness and durability. This versatile headlight offers powerful high and low beams, a crisp cold white light, and a reliable daytime running light. Ideal for construction equipment, it ensures optimal visibility and safety in any environment. Built to meet stringent standards, it's the perfect upgrade for enhanced performance and reliability.



100W



9-32V



5600  
LUMENS



IP68



driving



EMC



E




**Specifications**

- DC 9 - 32 Volts
- High Beam = 60 Watt - Low Beam = 30 Watt - DRL = 10 Watt
- 5600 Lumen - High Beam / 2400 Lumen - Low Beam
- Lightcolor: Cold white
- Color temperature: 6000K
- ECE R 10, ECE R149, ECE R148, R65
- Size: 229 x 152 x 106mm
- EMC CISPR 25 Class 4
- E Mark Certified
- EMC - CISPR25 Class 4 (Radio Frequency Suppression)
- Complies with IP68
- Supplied with 6 Pin Deutsch Socket & Plug Connector
- Suitable on Construction Equipment such as JCB & Manitou



# LG126

## Front Position Light with Indicator

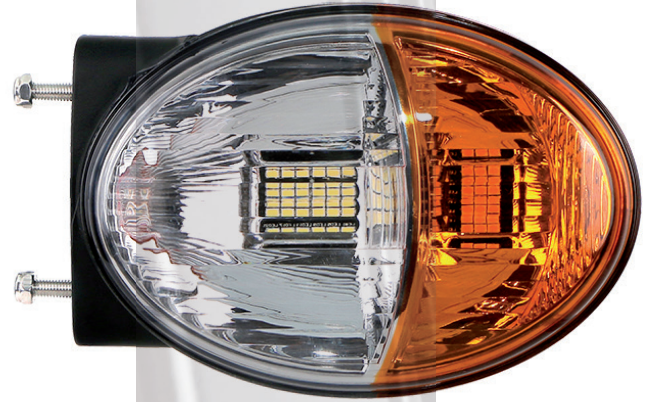

Introducing our Front Position Light with Indicator, perfect for both on-road and off-road applications. Built with a durable aluminum housing and advanced design, this light offers reliable performance and exceptional visibility. Its high-quality construction ensures longevity and optimal functionality, making it a versatile and dependable addition to your vehicle's lighting system. Enhance your driving experience with this robust and efficient lighting solution.



### Specifications

- Housing: Powder coated aluminium
- Application: On-road as well as off-road
- Front Indicator and Position Light
- Power: 24 watt
- Voltage Range: 9/32V
- Lifespan: 50,000 hours
- Certifications: E Mark Certified / IP68
- Approval: ECE R10 Approved
- EMC: CISPR25 Class 4 (Radio Frequency Suppression)
- Size: 142 x 96 x 73 mm



# Tractor Worklights & Universal

## Work Lights

Illuminate your fields and roads with our Tractor and Universal Lights, designed for superior visibility and performance. These versatile lights offer powerful illumination for tractors and a range of other vehicles, enhancing safety and efficiency in all conditions. Built to withstand tough environments, our lights provide reliable, long-lasting performance whether you're working during the day or night. Upgrade your equipment with our high-quality lighting solutions for bright, dependable visibility wherever you go.

# LG897

## 60 Watt LED Flood Beam Work Light



60W



9/32V



IP68



E



EMC



6000  
LUMENS



### Specifications

- 60 Watts (12 x 5 Watt LED)
- 9 - 32 Volts
- 6000 Lumen
- Size: 112 x 135 x 84.5mm
- ECE R10
- EMC to CISPR25 Class 4
- 360 Degree Swivel Bracket
- IP68
- Supplied with DT Plug & Play
- Diecast Aluminium Housing



## LG833


50 Watt LED Round Work Light



VALTRA

### Specifications

- 9 - 32 Volts
- Size: 103 x 140 x 104.5mm
- 4000 Lumen
- Diecast Aluminium Housing
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG844


40 Watt LED Work Light for John Deere



Premium Series

### Specifications

- 9 - 32 Volts
- Size: 120 x 140 x 102mm
- 3200 Lumens
- Diecast Aluminium Housing
- Supplied with 7024 Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG845


40 Watt LED Work Light for John Deere



20 & 30 Series

### Specifications

- 9 - 32 Volts
- Size: 120 x 140 x 102mm
- 3200 Lumens
- Diecast Aluminium Housing
- Supplied with 7024 Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 4

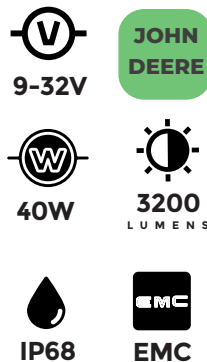

## LG849

30 Watt LED Round Work Light



NEW HOLLAND


JOHN DEERE

CLAAS

DEUTZ

### Specifications

- 9 - 32 Volts
- Size: 85 x 114.2 x 72.4mm
- 2400 Lumens
- Diecast Aluminium Housing
- Supplied with H9 Plug & Socket
- ECE R10 Approved
- EMC Cispr 25 Class 4

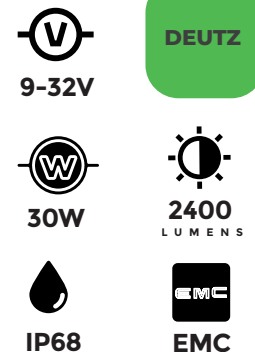

## LG834

50 Watt LED Cab Insert Work Light



**R Series**

### Specifications

- 9 - 32 Volts
- Size: 191 x 107 x 65mm
- 4800 Lumens
- Diecast Aluminium Housing
- Supplied with 7024 Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG835

60 Watt LED Work Light for R Series John Deere



**R Series**

### Specifications

- 9 - 32 Volts
- Size: 120 x 140 x 102mm
- 4800 Lumens
- Diecast Aluminium Housing
- Supplied with 7024 Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG839

40 Watt Standard Mount LED Work Light



**MASSEY FERGUSON**

**CASE**

**CLAAS**

### Specifications

- 9 - 32 Volts
- Size: 140 x 96 x 60mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



## LG841

40 Watt LED Cab Insert Light



### Specifications

- 9 - 32 Volts
- Size: 167 x 104.5 x 75mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



**MASSEY FERGUSON**




## LG816

50 Watt LED High Lumen Work Light



### Specifications

- 9 - 32 Volts
- Size: 177 x 88 x 78mm
- 6000 Lumen
- Combi Beam
- Diecast Aluminium Housing
- Supplied with DT Socket & Plug
- ECE R10 Approved
- EMC Cispr 25 Class 4

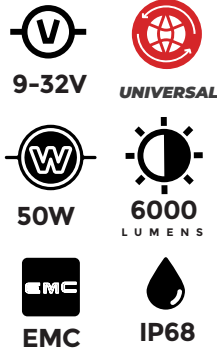


## LG847

40 Watt LED Adjustable Mount Oval Work Light



### Specifications

- 9 - 32 Volts
- Size: 142 x 88 x 60mm
- 40 Watts
- 3200 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4

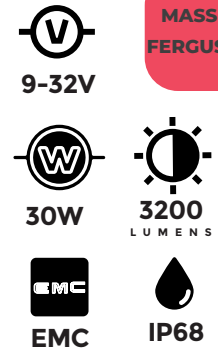


## LG858

24 Watt Oval LED Work Light



### Specifications

- 9 - 32 Volts
- Size: 144 x 102 x 65mm
- 1600 Lumens
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4

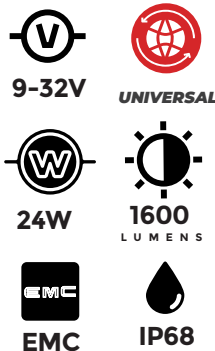

## LG870

30 Watt LED Adjustable Mount Work Light



### Specifications

- 9 - 32 Volts
- Size: 119 x 100 x 45mm
- 30 Watts
- Spot Beam
- 2200 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4



# LG880

## 4-inch Square, 20-watt LED Sprayer Light

Enhance your nighttime crop spraying with our 4-inch Blue Light, engineered to provide superior visibility and efficiency. Designed for mounting at the end of your sprayer's arm, this light delivers a focused beam that illuminates the mist, helping operators spot any nozzle blockages with ease. Built to withstand extreme conditions and offer reliable performance, it's the ideal solution for precise nighttime operations. Ensure optimal spraying and prevent disruptions with this essential tool.



### Specifications

- Light color: Blue
- Power: 20 watts
- Lumen: 4000
- Voltage: 9 to 32 volts
- LED: 4 pieces by 5 watt, Cree
- Approval: EMC R10, EMC CSP R25, EMC Class 4
- IP rating: IP69K
- Operating Temperatures: -40°C to 80°C
- Light pattern: Long spotlight



# LG875

13.5 Watt LED Square Work Light



### Specifications

- 12-55 Volts
- Size: 123 x 100 x 70mm
- 2500 Lumen
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC CISPR25 Class 4



12-55V



13.5W



EMC



2500 LUMENS

NEW HOLLAND

CLAAS

JOHN DEERE

CASE

MASSEY FERGUSON

VALTRA

DEUTZ



# LG878

50 Watt LED Flood Beam Work Light



### Specifications

- 50 Watts (5 x 10 Watt LED)
- 9 - 32 Volts
- 4000 Lumen
- Size: 87 x 112 x 65mm
- ECE R10• EMC to CISPR25 Class 4
- Swivel Bracket • IP68
- Supplied with DT Plug & Play



9-32V



50W



EMC



4000 LUMENS

NEW HOLLAND

JOHN DEERE

MASSEY FERGUSON

DEUTZ

CLAAS

CASE

VALTRA

# LG886

90 Watt LED Work Light



### Specifications

- 9 - 32 Volts
- 7200 Lumen
- Diecast Aluminium Housing
- Size: 106 x 134 x 79mm
- Supplied with DT Plug & Play
- ECE R10 Approved
- EMC Cispr 25 Class 4



9-32V



90W



EMC

FENDT

JOHN DEERE



7200 LUMENS



IP68



# LG851

## 15 Watt Mini LED Work Light



Introducing the 15 Watt Mini LED Work Light, a compact yet powerful lighting solution. Delivering 1200 lumens, this versatile work light features a flood beam for broad illumination. Its durable diecast aluminum housing ensures long-lasting performance, and it is ECE R10 approved with EMC CISPR 25 Class 4 compliance. Perfect for various applications.



15W



9-32V



1200  
LUMENS



EMC



E



IP68

### Specifications

- 9 - 32 Volts
- Size: 51 x 51 x 47mm
- 1200 Lumen
- Flood Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC - CISPR25 Class 3




## LG865(1) - LG865B (10)

15 Watt LED Work Light



### Specifications

- 9 - 32 Volts
- Size: 110 x 126 x 38mm
- 15 Watts
- 1000 Lumen • Flood to Spot Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC - CISPR25 Class 3

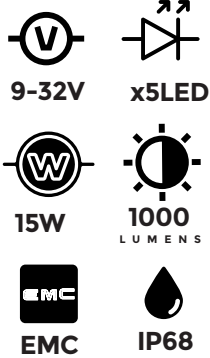


## LG860(1) - LG860B (10)

48 Watt LED Work Light



### Specifications

- 9 - 32 Volts
- Size: 110 x 126 x 57mm
- 3300 Lumen
- 48 Watts
- Spot Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC - CISPR25 Class 3

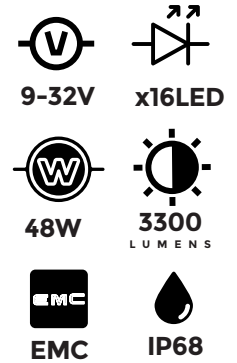


## LG874

80 Watt LED High Lumen Work Light



### Specifications

- 80 Watts
- 9 - 32 Volts
- Size: 109 x 109 x 57mm
- Combi Beam • 9500 Lumen
- ECE R10
- EMC - CISPR25 Class 3
- IP68
- Built in DT Male & Female Connector

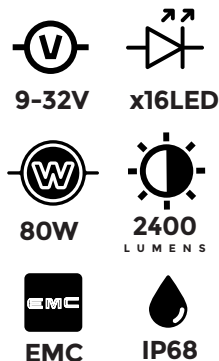


## LG843

40 Watt LED Work Light



### Specifications

- 9 - 32 Volts
- Size: 131 x 106 x 79mm
- 3200 Lumen
- Diecast Aluminium Housing
- Supplied with DT Plug & Play Connector
- ECE R10 Approved
- EMC Cispr 25 Class 4

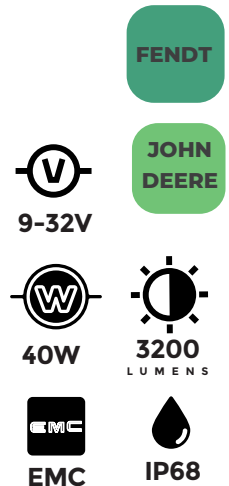

# LG810

45W LED Rectangle Work Light




### Specifications

- 9 - 32 Volts
- Size: 115 x 109 x 73mm
- 3600 Lumens
- Diecast Aluminium Housing
- Supplied with 2 core cable
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Bottom mounted

9-32V
 x15LED  
 45W
 3600 LUMENS  
 EMC
 IP68

# LG850

40W Cab Insert Work Light

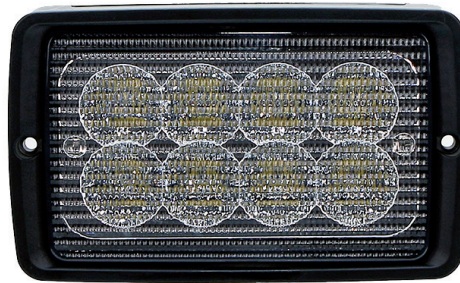

### Specifications

- LED Power: 40 Watt CREE LED 5W/PC
- Operating Volt: 10-30 Volt DC
- Light Output: about 3200 Lumen
- Color Temperature: 5700K
- Operation Temp: -40°C to 80°C
- Waterproof Rate: IP68
- Beam: flood beam
- Diecast aluminum housing
- Stainless steel bracket
- Size: 155 x 94 x 64mm

9-32V
 3200 LUMENS  
 40W
 IP68  
 EMC
 JOHN DEERE

# LG840

20 Watt Cab Insert Work Light for John Deere




### Specifications

- 9 - 32 Volts
- Size: 138 x 62.5 x 38.5mm
- 1400 Lumens
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4

9-32V
 JOHN DEERE  
 20W
 1400 LUMENS  
 EMC
 IP68

# LG842

40 Watt LED Cab Insert Work Light

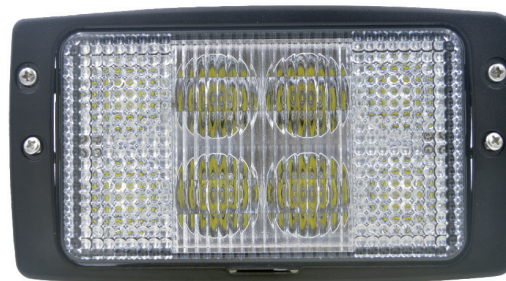

### Specifications

- 9 - 32 Volts
- Size: 184 x 102 x 64.7mm
- 3200 Lumens
- Diecast Aluminium Housing
- Supplied with H4 Plug & Socket
- ECE R10 Approved
- EMC Cispr 25 Class 4

40W
 3200 LUMENS  
 EMC

NEW HOLLAND  
 MASSEY FERGUSON  
 DEUTZ  
 CLAAS  
 FENDT  
 VALTRA

## LG846

40 Watt LED Cab Insert Work Light



Specifications
• 9 - 32 Volts
• Size: 152 x 102 x 61mm
• 3200 Lumens
• Diecast Aluminium Housing
• Supplied with DT Plug & Play
• ECE R10 Approved
• EMC Cispr 25 Class 4



40W



EMC



3200 LUMENS



## LG852

40 Watt LED Adjustable Mount Work Light



Specifications
• 10 - 32 Volts
• Size: 156 x 122 x 95mm
• 3000 Lumen
• Diecast Aluminium Housing
• Supplied with DT Plug & Play
• ECE R10 Approved
• EMC Cispr 25 Class 4



40W



EMC



3000 LUMENS



## LG856

24 Watt LED Adjustable Mount Work Light



Specifications
• 10 - 32 Volts
• Size: 156 x 122 x 93mm
• 1800 Lumen
• Diecast Aluminium Housing
• Supplied with DT Plug & Play Connector
• ECE R10 Approved
• EMC Cispr 25 Class 4




24W



EMC



1800 LUMENS



## LG887

50 Watt Standard Mount LED Work Light



Specifications
• 9 - 32 Volts
• Size: 177 x 88 x 85mm
• 4000 Lumens
• Diecast Aluminium Housing
• Supplied with DT Plug & Play
• ECE R10 Approved
• EMC Cispr 25 Class 4



50W



EMC



4000 LUMENS



IP68



# LG898

## 160 Watt LED Flood Beam Work Light

Introducing the 160 Watt LED Flood Beam Work Light, engineered for maximum illumination and durability. This powerful work light delivers an impressive 11200 lumens, making it ideal for any demanding task. With a versatile design featuring a detachable swivel bracket for bottom or side mounting, it ensures easy installation. Built to withstand harsh conditions.



### Specifications


- 160 Watts (8 x 20 Watt LED)
- 9 - 32 Volts
- 11200 Lumen
- Size: 154 x 125 x 77mm
- ECE R10
- EMC to CISPR25 Class 3
- Detachable swivel Bracket for Botom or
- Side Mount
- IP68
- Built in DT Male & Female Connector
- Diecast Aluminium Housing



Original equipment names and images are quoted and shown for reference purposes only and are not intended to infer that our replacement lights or parts are used as original equipment or OEM


## LG815

18W Rectangular Work Light

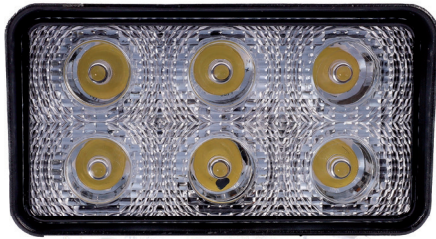


### Specifications

- 9 - 32 Volts
- Size: 111 x 90 x 46mm
- 1200 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC - CISPR25 Class 3

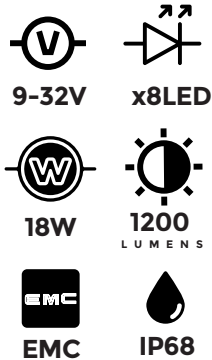

## LG871

45 Watt LED Rectangular Adjustable Mount Work Light

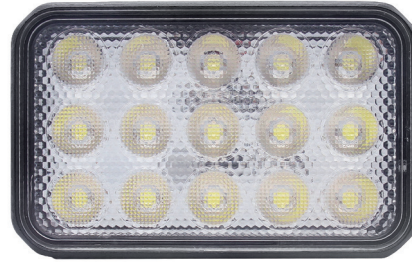



### Specifications

- 9 - 32 Volts
- Size: 149 x 120 x 47mm
- 45 Watts
- Spot Beam • 3000 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC - CISPR25 Class 3



## LG896

Universal Handrail Bracket for Work Lights

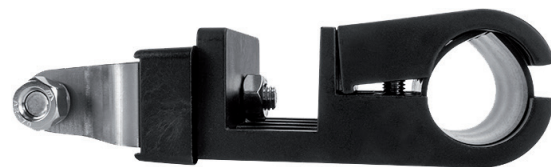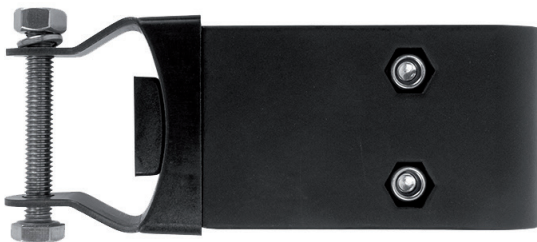

### Specifications

- Suitable for Side Mounted Work Light
- Designed for handrails with a diameter of 23mm to 28mm
- Angle of Work Light can be adjusted
- Size: Height: 35mm x Width: 142mm x Depth: 52.5mm

# LG862

## 18 Watt LED Slim Work Light



### Specifications

- 9-32 Volts
- Size: 161 x 47 x 56mm
- 1260 Lumens
- Spot Beam
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4



# LG890

## 18 Watt LED Scene Light

### Specifications

- 12-28 Volts
- Size: 230 x 47 x 47mm
- Scene Light
- 18 Watts
- 1450 Lumen
- Diecast Aluminium Housing
- ECE R10 Approved
- EMC Cispr 25 Class 4





# Radiance Series

## Work Lights

Illuminate your workspace with unparalleled clarity using our Work Lights Radiance Series. Engineered for maximum brightness and durability, these lights provide exceptional illumination to enhance productivity and safety. The Radiance Series features advanced LED technology and rugged construction, ensuring reliable performance even in the harshest conditions.



# LG872

24 watt LED flood beam round work light

## Specifications

- 9 - 32 Volts
- 2400 Lumen
- Size: 82 x 103 x 48mm
- Flood Beam
- 6 x 4 Watt LEDs
- ECE R10
- EMC to CISPR25 Class 3
- IP68
- Fitted with Breather Filter
- Diecast Aluminium Housing



**RADIANCE SERIES**



# LG968

24 Watt Flood LED Work Light

## Specifications

- Nominal lamp power: 32 Watt
- 8 x 4 Watt LEDs
- Suitable for 9-32V DC
- 3200 Lumen, Effective 2560 Lumen
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Size: 111 x 84.5 x 49.5mm



# LG970

## 40 watt oval flood LED work light



### Specifications

- Nominal lamp power: 40 Watt
- 10 x 4 Watt LEDs
- Suitable for 9-32V DC
- 4000 Lumen, Effective 3200 Lumen
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Operation Temperature: -40°C~60°C
- Size: 142.5 x 114.5 x 46.5mm



# LG974

## 40 watt LED oval flood light work light, dual mount swivel

### Specifications

- Nominal lamp power: 40 Watt
- 10 x 4 Watt LEDs
- Suitable for 9-32V DC
- 4000 Lumen, Effective 3200 Lumen
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Operation Temperature: -40°C~60°C
- Size: 142.5 x 114.5 x 46.5mm



# LG966

## 24 watt square flood LED work light



### Specifications

- Nominal lamp power: 24 Watt
- 6 x 4 Watt LEDs
- Suitable for 9-32V DC
- 2400 Lumen, Effective 1920 Lumen
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Operation Temperature: -40°C~60°C
- Size: 76 x 101 x 39mm



# LG879

## 36 Watt LED Flood Beam Work Light



### Specifications

- Nominal lamp power: 36 Watt
- 9 x 4 Watt high intensity CREE XTE LEDs
- Suitable for 9-32V DC
- 3600 Lumens - 50,000h+
- Vibration Test to 15G
- IP68
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Size: 82 x 103 x 48mm



# LG960

## 64 Watt Flood LED Work Light



### Specifications

- Nominal lamp power: 64 Watt
- 16 x 4 Watt LEDs
- Suitable for 9-32V DC
- 6400 Lumen, Effective 5120 Lumen
- IP68 (Rated Against Moisture Ingress)
- EMC - CISPR25 Class 3
- Operation Temperature: -40°C-60°C
- ECE R10 Approved
- Size: 108 x 140 x 56mm



# LG964

## 32 Watt Flood LED Work Light



### Specifications

- Nominal lamp power: 32 Watt
- 8 x 4 Watt LEDs
- Suitable for 9-32V DC
- 3200 Lumen, Effective 2560 Lumen
- Flood Beam
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Size: 111 x 84.5 x 49.5mm



# LG962

## 24 Watt Flood LED Work Light



### Specifications

- Nominal lamp power: 24 Watt
- 6 x 4 Watt LEDs
- Suitable for 9-32V DC
- 2400 Lumen, Effective 1920 Lumen
- IP68 (Rated Against Moisture Ingress)
- ECE R10 Approved
- EMC - CISPR25 Class 3
- Size: 148.5 x 53 x 45mm



# LG972

## 60 watt LED flood beam work light with dual mount swivel



### Specifications

- LEDs: 15 x 4 Watt Osram LEDs
- Voltage: Suitable for 9-32V DC
- Lumens: 6000 Raw Lumen, 4800 Effective
- Beam: Flood Beam
- IP Rating: IP68 (rated against moisture ingress)
- Approval: ECE R10 Approved
- EMC: CISPR25 Class 4  
(Radio Frequency Suppression)
- Light Colour: Cold white
- Size: 154mm x 123.7mm x 59mm
- Colour temperature: 6000K
- Operating Temperature: -40°C to 60°C





# WORK LIGHTS

## BARS

Enhance your workspace with our powerful Work Light Bars. Designed for maximum illumination, these light bars are perfect for a variety of applications, from construction sites to outdoor projects. Built with durability in mind, they withstand tough conditions while providing consistent, bright light. Easy to install and energy-efficient, our work light bars ensure you have the visibility needed to work safely and efficiently, no matter the environment.

# LG803

## 72 Watt LED Work Light Bar

### Specifications

- 9 - 32 Volts
- 72 Watt
- 5760 Lumen • Combi Beam
- 24 x 3 Watt LED
- EMC • ECE R10
- Size: 412 x 114 x 90
- Diecast Aluminium Housing



# LG800

## 120 Watt LED Work Light Bar

### Specifications

- 9 - 32 Volts
- 120 Watt
- 9600 Lumen • Combi Beam
- 40 x 3 Watt LED
- EMC • ECE R10
- Size: 616 x 114 x 90mm
- Diecast Aluminium Housing



# LG801

## 180 Watt LED Work Light Bar

### Specifications

- 9 - 32 Volts
- 180 Watt
- 14400 Lumen • Combi Beam
- 60 x 3 Watt LED
- EMC • ECE R10
- Size: 872 x 114 x 90mm
- Diecast Aluminium Housing



## LG802

### 180 Watt LED Curved Work Light Bar



180W



9-32V



14400  
LUMENS



IP67

#### Specifications

- 9 - 32 Volts
- 14400 Lumen
- Combi Beam
- Size: 887 x 114 x 90mm
- Diecast Aluminium



## LG804

### 240 Watt LED Curved Work Light Bar



240W



9-32V



19200  
LUMENS



IP67

#### Specifications

- 9 - 32 Volts
- 19200 Lumen
- Combi Beam
- Size: 1120 x 114 x 90mm
- Diecast Aluminium







**Our rigorous quality control measures ensure that every product that leaves our facility is of the highest standard, giving our customers peace of mind and confidence in our brand.**



**Our product development is meticulous, encompassing several critical stages. During the design phase, our engineers employ the latest software technologies to conceptualize new products.**

**In the prototyping stage, we produce molds and samples that undergo stringent testing. The samples are then tested under various conditions and climates to ensure robustness.**

**Following successful tests, the products move to mass production, undergo further quality control, and receive necessary certifications like ECE and CE. Finally, the finished products are branded and shipped to our distribution centers, ready for sale to our diverse clientele.**



# LED WARNING

## STROBES

Enhance your vehicle's safety with our top-of-the-line Warning Strobes. Designed to deliver powerful, attention-grabbing flashes, these strobes are essential for emergency situations and roadside assistance. With easy installation and robust performance, our Warning Strobes ensure you're visible when it matters most, keeping you and others safe on the road.

# LG767


## 6 LED Amber Warning Strobe



Introducing our **LED Driving Light featuring Dual Colour Position and an Amber Warning Strobe**. Comes with 6 LED diodes for enhanced safety, integrated into the warning strobe. Drive with confidence in all situations.

### Specifications

- 10 - 30 Volts
- 18 Flash Patterns
- Pre Wired
- Clear Lens, Amber Flash
- IP67
- ECE R10 Approved
- EMC Cispr 25 Class 3
- Can be paired with others
- Size: 111mm x 28mm x 10mm

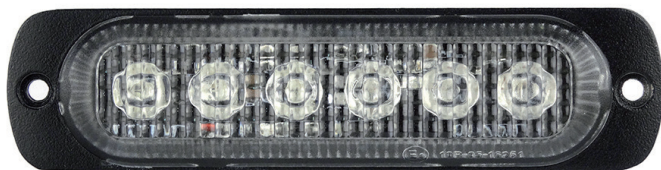

Original equipment names and images are quoted and shown for reference purposes only and are not intended to infer that our replacement lights or parts are used as original equipment or OEM

## LG763

### 3 LED Amber Warning Strobe

#### Specifications

- 9 Watt
- 12-24 Volts
- Size: 98 x 31 x 6.6mm
- Amber Flashing • 21 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3




## LG764

### 4 LED Amber Warning Strobe

#### Specifications

- 12 Watt
- 12-24 Volts
- Size: 98 x 31 x 6.6mm
- Amber Flashing • 21 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

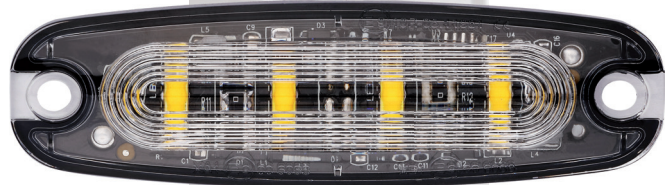

## LG765

### 6 LED Amber Warning Strobe

#### Specifications

- 18 Watt
- 12-24 Volts
- Size: 131 x 31 x 6.6mm
- Amber Flashing • 21 Flash Patterns
- 3M Adhesive Mounting Option
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3




# LG760

## 12 LED Amber & Red Warning Strobe

### Specifications

- 12-24 Volts
- Size: 120 x 31 x 14mm
- Amber & Red Flashing
- 21 Flash Patterns
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

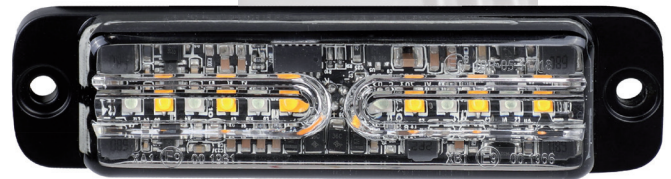


# LG761

## 12 LED White & Red Warning Strobe

### Specifications

- 12-24 Volts
- Size: 120 x 31 x 14mm
- White & Red Flashing
- 21 Flash Patterns
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

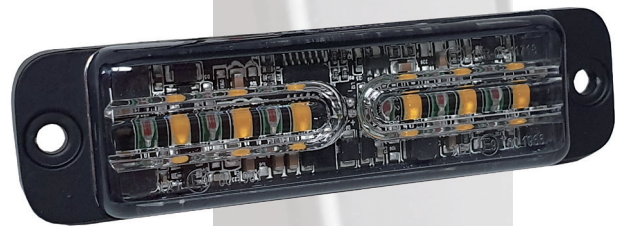


# LG762

## 12 LED Amber & White Warning Strobe

### Specifications

- 12-24 Volts
- Size: 120 x 31 x 14mm
- Amber & Red Flashing
- 21 Flash Patterns
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3

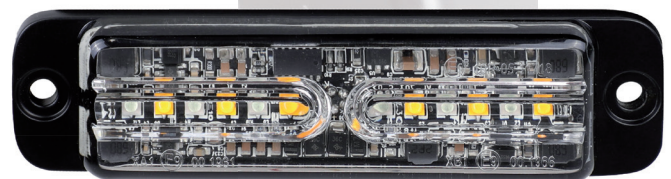

## LG754

3 LED Amber Warning Strobe



**AMBER STROBE**

### Specifications

- 12-24 Volts
- Size: 80 x 28 x 19mm
- 3 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others

<b>12-24V</b>	<b>x3LED</b>
<b>26FP</b>	<b>IP67</b>
<b>EMC</b>	<b>UNIVERSAL</b>

## LG755

4 LED Amber Warning Strobe



**AMBER STROBE**

### Specifications

- 12-24 Volts
- Size: 96 x 25 x 28mm
- 4 LEDs
- 14 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others

<b>12-24V</b>	<b>x4LED</b>
<b>14FP</b>	<b>IP67</b>
<b>EMC</b>	<b>UNIVERSAL</b>

## LG757

4 LED Grille Red Warning Strobe



**RED STROBE**

### Specifications

- 12-24 Volts
- Size: 96 x 25 x 28mm
- 4 LEDs
- 14 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others

<b>12-24V</b>	<b>x4LED</b>
<b>14FP</b>	<b>IP67</b>
<b>EMC</b>	<b>UNIVERSAL</b>

## LG758

4 LED Grille White Warning Strobe



**WHITE STROBE**

### Specifications

- 12-24 Volts
- Size: 96 x 25 x 28mm
- 4 LEDs
- 14 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others

<b>12-24V</b>	<b>x4LED</b>
<b>14FP</b>	<b>IP67</b>
<b>EMC</b>	<b>UNIVERSAL</b>

# LG759

4 LED Grille Blue Warning Strobe



# LG776

White LED Marker Light with Amber Warning Strobe



## Specifications

- 12-24 Volts
- Size: 96 x 25 x 28mm
- 4 LEDs
- 14 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others



## Specifications

- 12-24 Volts
- Size: 132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker Light
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67



# LG777

Red LED Marker Light with Amber Warning Strobe



## Specifications

- 12-24 Volts
- Size: 132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67



## LG774

4 LED Amber Super Slim Grille Warning Strobe



**AMBER STROBE**

### Specifications

- 12-24 Volts
- Size: 86 x 15 x 26mm
- 4 LEDs
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- 2 Way Mounting Brackets
- IP67



12-24V



x4LED



21FP



IP67



EMC



UNIVERSAL

## LG770

4 LED Square Amber Warning Strobe



**AMBER STROBE**

### Specifications

- 12-24 Volts
- Size: 74 x 90 x 32mm
- 4 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67



12-24V



x4LED



26FP



IP67




EMC



UNIVERSAL

## LG766

LED 180 Degree Amber Warning Strobe

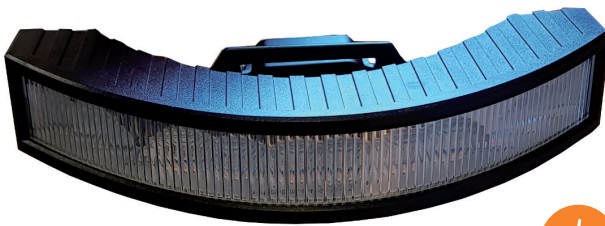

**AMBER STROBE**

### Specifications

- 9-30 Volts
- Size: 170 x 80 x 30mm
- 12 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67



9-30V



x12LED



26FP



IP67



EMC



UNIVERSAL

## LG778<sub>AMBER</sub> - LG779<sub>RED</sub>

4 LED Hideaway Amber and Red Warning Strobe



**AMBER STROBE**



**RED STROBE**

### Specifications

- 12-24 Volts
- Size 27 x 24 x 39mm
- 4 LEDs
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- 2 Way Mounting Brackets
- Can be paired with others



12-24V



x4LED



21FP



IP67



EMC




UNIVERSAL



# LG782

2 LED Hideaway Amber Warning Strobe

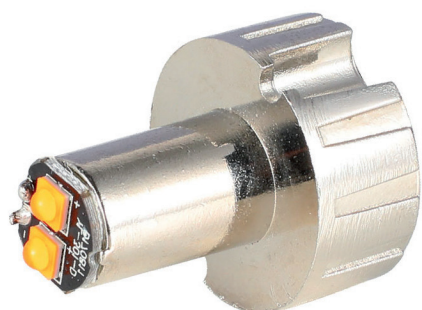

AMBER STROBE

## Specifications

- 9-30 Volts
- Size 27 x 24 x 39mm
- 2 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- Can be paired with others



9-30V



x2LED



26FP



IP67



EMC



UNIVERSAL

# LG783

2 LED Hideaway Red Warning Strobe



RED STROBE

## Specifications

- 9-30 Volts
- Size 27 x 24 x 39mm
- 2 LEDs
- 26 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- Can be paired with others



9-30V



x2LED



26FP



IP67



EMC



UNIVERSAL

# LG790

LED Tail Lift Warning Strobe

## Specifications

- 12-36 Volts
- Size 74 x 74 x 14mm
- 4 LEDs
- 6 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67
- Can be paired with others



12-36V



EMC



4 LED



6FP



IP67



UNIVERSAL



tail lift warning strobe





## LG857

LED Blue Spot Warning Light for Forklifts



BLUE SPOT

Specifications
• 9 - 80 Volts
• Size: 90 x 123 x 80mm
• Blue Spot Light
• 9 Watt
• ECE R10 Approved
• IP67

	
9-80V	9W
	
SPOT	IP67
	
EMC	UNIVERSAL







## LG854

Red Line LED Forklift Safety Light



RED LINE

Specifications
• 9 - 80 Volts
• Size: 76 x 79 x 46mm
• Red Safety Line
• 15 Watt
• ECE R10 Approved
• IP67






	
12-80V	15W
	
x3LED	IP67
	
EMC	UNIVERSAL

## LG1456

92-107 DB Safety Reversing Alarm



Specifications
• 12 - 80 Volts
• Size: 102 x 68 x 36mm
• Beeping Or White Noise
• Supplied with 2 Core Cable
• ECE R10 Approved
• EMC Cispr 25 Class 3
• IP67
• 92-107 DB







	
12-80V	EMC
	
107DB	IP67
	
UNIVERSAL	

## LG677

LED Bolt Down Forklift Beacon



Specifications
• 10 - 80 Volts
• Size: 130 x 100mm
• Amber Flash
• ECE R10 Approved
• EMC Cispr 25 Class 3
• IP67

	
10-80V	UNIVERSAL
	
4 LED	EMC
	
1FP	IP67



# Warning LIGHTS

## Warning Beacons

Ensure maximum visibility and safety with our high-performance Warning Beacons. Designed to catch attention in critical situations, these beacons provide powerful, eye-catching alerts for emergency response, construction sites, and roadside safety. With robust construction and bright, flashing lights, they offer reliable performance and durability in any environment.



# LG706

## Pole Mounted Halogen Warning Beacon

### Specifications

- Flexi Din Base
- 12 Volt or 24 Volt Bulb
- 1 Flash Pattern
- Pole Mounted Base
- High Quality Flexible Rubber
- Amber Flashing / 50,000+ hrs
- IP67
- ECE R10 Approved
- ECE R65 Approved
- EMC - CISPR25 Class 3 (Radio Frequency Suppression)
- Size: 209 x 126mm



12-24V



EMC



1FP



IP67



POLE



AMBER  
STROBE



# LG707

## LED Pole Mounted Warning Beacon

### Specifications

- Flexi Din Base
- 12-24 Volt
- 3 Flash Patterns
- Pole Mounted Base
- High Quality Flexible Rubber Stem
- Amber Flashing - 50,000+ hrs
- IP67
- ECE R10 Approved
- ECE R65 Approved
- EMC - CISPR25 Class 3 (Radio Frequency Suppression)
- Size: 208mm x 128mm



12-24V



EMC



3FP



IP67



POLE



AMBER  
STROBE



# LG685

## Pole Mounted LED Warning Beacon



### Specifications

- Operating voltage: 10 to 30 volts
- LED count: 48 LEDs
- Mount: Flexible DIN mount
- Operating Temperature: -30°C to 60°C
- IP Rating: IP67 (rated against moisture ingress)
- Approval: ECE R10 (EMC), R65 approved
- Size:
- Diameter: 131mm
- Height: 117mm (excluding pole)
- Total height including pole: 215.4mm



12-24V



EMC



1FP



IP67



POLE



AMBER  
STROBE



# LG690

## Pole Mounted LED Warning Beacon

### Specifications

- Flexi Din Base
- 12-24 Volts
- Size: 240 x 127mm
- Amber Flashing
- 3 Flash Patterns
- Pole Mounted base
- ECE R10 Approved
- ECE R65 Approved

-  12-24V
-  EMC
-  3FP
-  IP67
-  POLE
-  AMBER STROBE










*To change pattern remove lens and press the red button*

# LG713

## Pole Mounted Fast Spinning Halogen Beacon

### Specifications

- Flexi Din Base
- 12 Volts
- Size: 290 x 150mm
- Amber Flashing
- Fast Spinning
- Pole Mounted base
- ECE R65 Approved
- Belt Motor

-  12-24V
-  EMC
-  3FP
-  IP67
-  POLE
-  BELT MOTOR
-  AMBER STROBE



# LG714

## Pole Mounted LED Warning Beacon

### Specifications

- Flexi Din Base
- 12-24 Volts
- Size: 290 x 150mm
- Amber Flashing
- 3 Flash Patterns
- Pole Mounted base
- ECE R65 Approved



12-24V



EMC



3FP



IP67



POLE



AMBER STROBE



# LG692

## Magnetic Mounted LED Warning Beacon

### Specifications

- 12-24 Volts
- Size: 167 x 140mm
- Amber Flashing
- 3 Flash Patterns
- Magnetic Mounted Base
- Supplied with Cigarette Plug
- ECE R10 Approved
- ECE R65 Approved
- EMC Cisp 25 Class 3



12-24V



EMC



3FP



IP67



Magnetic



AMBER STROBE



**To change pattern remove lens and press the red button**



# LG708

## Magnetic LED Warning Beacon

### Specifications

- 12-24 Volts
- Size: 140 x 140mm
- Amber Flashing
- 3 Flash Patterns
- Magnetic Mounted Base
- Supplied with Cigarette Plug
- ECE R10 Approved
- ECE R65 Approved
- EMC Cspr 25 Class 3



 *To change pattern remove lens and press the red button*



# LG715

## Rechargeable LED Magnetic Warning Beacon

### Specifications

- 10 - 30 Volts
- Size: 150 x 130mm
- Magnetic Mounted
- 8 Flash Patterns
- ECE R10 Approved
- 3 Pieces of 18650 Lithium Battery
- IP67
- Amber Flashing
- Battery Indicator on Front



 *To change pattern remove lens and press the red button*





# LG694

## 1 Bolt LED Warning Beacon

### Specifications

- 12-24 Volts
- Size: 194 x 127mm
- Amber Flashing
- 3 Flash Patterns
- 1 Bolt Down Mounting
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3



12-24V



EMC



3FP



IP67



BOLT



AMBER STROBE



*To change pattern remove lens and press the red button*



# LG689

## 1 Bolt LED Warning Beacon with Amber Flash

### Specifications

- 12-24 Volts
- Size: 142 x 120mm
- Amber Flashing
- Clear Lens
- 3 Flash Patterns
- 1 Bolt Mounted
- ECE R10 Approved
- ECE R65 Approved
- EMC Cispr 25 Class 3



12-24V



EMC



3FP



IP67



BOLT



AMBER STROBE



*To change pattern remove lens and press the red button*



# LG773

## LED Rechargeable Warning Strobe Kit

### Specifications

- Magnetic Mounted
- Supplied with Cigarette Plug & Cable
- IP67
- ECE R10 Approved
- ECE R65 Approved
- 1 Flash Pattern ( Double Flash)
- IP67
- Amber Flashing
- Supplied in Carry Case
- 2 Hours Charging Time
- 8 Hours Work time on full Charge



10-30V



x12 LED



EMC



Magnetic



1FP



IP67







# LG712

LED Low Profile Magnetic Mounted Beacon



Specifications
• 10 - 30 Volts
• Size: 40 x 112mm
• Magnetic Mounted
• Flash Change Button
• 3 Flash Patterns
• ECE R10 Approved
• EMC Cispr 25 Class 3
• IP67
• Amber Flashing

 10-30V  
 **AMBER STROBE**  
 3FP  
 **Magnetic**  
 **EMC**  
 **IP67**

# LG673

LED Low Profile High Power Magnetic Beacon



Specifications
• 12-24 Volts
• Size: 112 x 46mm
• Magnetic Mounted
• Supplied with Cigarette Plug
• ECE R10 Approved
• ECE R65 Approved
• EMC Cispr 25 Class 3
• IP67
• Amber Flashing





 12-24V  
 **AMBER STROBE**  
 **Magnetic**  
 **IP67**  
 **EMC**  
 **UNIVERSAL**

# LG672

LED Magnetic Mounted Beacon



Specifications
• 12-24 Volts
• Size: 130 x 94mm
• Magnetic Mounted
• Supplied with Cigarette Plug
• ECE R10 Approved
• ECE R65 Approved
• EMC Cispr 25 Class 3
• IP67
• Amber Flashing







 12-24V  
 **AMBER STROBE**  
 1FP  
 **Magnetic**  
 **EMC**  
 **IP67**

# LG709

LED Low Profile Pole Mounted Beacon



Specifications
• 10 - 30 Volts
• Size: 140 x 112mm
• Pole Mounted
• 1 Flash Pattern
• ECE R10 Approved, ECE R65
• EMC Cispr 25 Class 3
• IP67
• Amber Flashing

 12-24V  
 **AMBER STROBE**  
 1FP  
 **Pole Mounted**  
 **EMC**  
 **IP67**


## LG695

Green LED Pole Mounted Beacon



### Specifications

- 10 - 30 Volts
- Size: 209 x 127mm
- 40 SMD LEDs
- Flexible Din Mount
- Suitable to work with Seat Belts
- ECE R10 Approved
- EMC Cispr 25 Class 3




## LG696

Green LED Low Profile Pole Mounted Beacon



### Specifications

- 10 - 30 Volts
- Size: 133 x 120mm
- 18 SMD LEDs
- Flexible Din Mount
- Suitable to work with Seat Belts
- ECE R10 Approved
- EMC Cispr 25 Class 3




## LG697

Green LED Magnetic Mount Beacon



### Specifications

- 10 - 30 Volts
- 40 SMD LEDs
- Magnetic Base
- Suitable to work with Seat Belts
- ECE R10 Approved
- EMC Cispr 25 Class 3

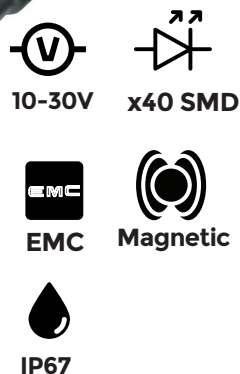


## LG698

LED Low Profile Green Magnetic Beacon



### Specifications

- 10 - 30 Volts
- Size: 40mm x 120mm
- 18 SMD LEDs
- Magnetic Base
- Suitable to work with Seat Belts
- ECE R10 Approved
- EMC Cispr 25 Class 3

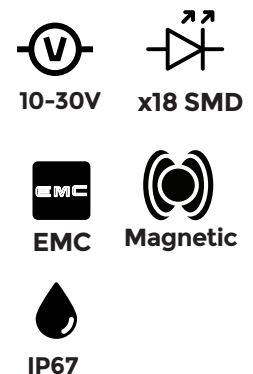

# LG630

## 1200mm LED Amber Flashing Warning Light Bar



### Specifications

- 10-30 Volts
- Size: 1197 x 264 x 44mm
- Power : 128 Watt
- 19 Flash Patterns
- TIR Lens
- Comes with a 3m cable
- Supplied with 3 Core Cable for simple installation,
- No need for complicated control box
- ECE R65 Approved
- ECE R10 Approved
- EMC Cispr 25 Class 3
- IP67



128W



10-30V



IP68



AMBER  
FLASH



EMC




19FP



## LG654 300mm Magnetic Amber LED Warning Light Bar

### Specifications

- 12-24 Volts
- Size: 300 x 159 x 75mm
- Amber Flashing
- 8 Flash Patterns
- Magnetic Mounting Base
- ECE R10 Approved
- ECE R65 Approved
- EMC Cisp 25 Class 3

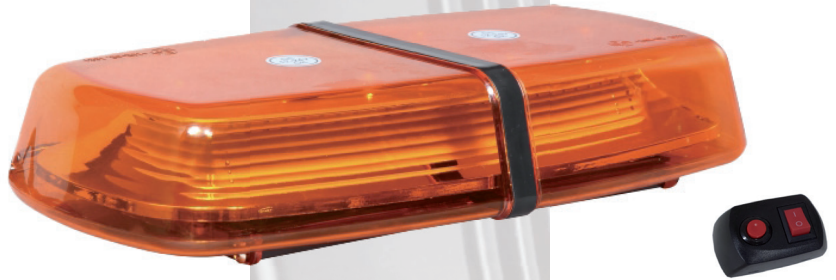

**AMBER  
FLASH**



**12-24V**



**Magnetic**



**EMC**



**8FP**

*Supplied with In Cab Switch and Cigarette Plug*

## LG656 300mm Magnetic Amber LED Warning Light Bar

### Specifications

- 12-24 Volts
- Size: 300 x 159 x 75mm
- Amber Flashing
- 8 Flash Patterns
- Magnetic Mounting Base
- ECE R10 Approved
- ECE R65 Approved
- EMC Cisp 25 Class 3



**AMBER  
FLASH**



**12-24V**



**Magnetic**



**EMC**



**8FP**

*Supplied with In Cab Switch and Cigarette Plug*

## LG655 300mm 1 Bolt Amber LED Warning Light Bar

### Specifications

- 12-24 Volts
- Size: 300 x 159 x 75mm
- Amber Flashing
- 8 Flash Patterns
- 1 Bolt Mounting
- ECE R10 Approved
- ECE R65 Approved
- EMC Cisp 25 Class 3



**AMBER  
FLASH**



**12-24V**



**BOLT**



**EMC**



**8FP**

# LG653

## 365mm Amber Flashing Magnetic Warning Bar

### Specifications

- 10-30 Volts
- Magnetic Mounted with Suction Cups
- Size: 363 x 171 x 59mm
- Dark Tinted Lens
- ECE R10
- ECE R65 TA1
- 26 Flash Patterns
- UKCA
- EMC to CISPR25 Class 3
- IP67
- Memory Function
- Supplied with Cigarette switch

Smoked Lens Series



Supplied with In Cab Switch and Cigarette Plug



10-30V



Magnetic



EMC



26FP



AMBER FLASH

# LG662

## LED Warning Beacon with Amber Flash

### Specifications

- 10-30 Volts
- Magnetic Mounted with Suction Cups
- Size: 585 x 295 x 115mm
- Dark Tinted Lens
- ECE R10
- ECE R65 TA1
- 26 Flash Patterns
- UKCA
- EMC to CISPR25 Class 3
- IP67
- Memory Function
- Supplied with Cigarette switch



10-30V



Magnetic



EMC



26FP



AMBER FLASH

## LG638

890mm LED Amber Flashing Warning Light Bar

## LG639

1200mm LED Amber Flashing Warning Light Bar

### Specifications

- 9 - 32 Volts
- LG639 Size: 1230 x 150 x 75mm
- LG638 Size: 790 x 150 x 75mm
- Amber Flashing
- White Side Position Light Option
- ECE R10 Approved
- ECE R65 Approved
- 29 Flash Patterns
- EMC Cispr 25 Class 3





## **LG3001**

---

### ***Straight Bolt Down Beacon Bracket***



## **LG3002**

---

### ***Foldable Side-Mounted Beacon Bracket***



## **LG3006**

---

### ***Collapsible Side Mounted Beacon Bracket***



## LG3000

---

### *Straight Bottom Mount Beacon Bracket*



## LG3004

---

### *L Shape Beacon Bracket*



## LG4005

---


### *Electric Circuit Seat Belt*

This seatbelt acts as a switch to activate the green beacon on the roof of construction vehicles to inform the supervisors that the operator has his seatbelt fastened by the indication of the green roof beacon flashing.

#### Specifications

- E Approved
- Orange Colour
- Break Strength 14700n
- Flexible Din Mount



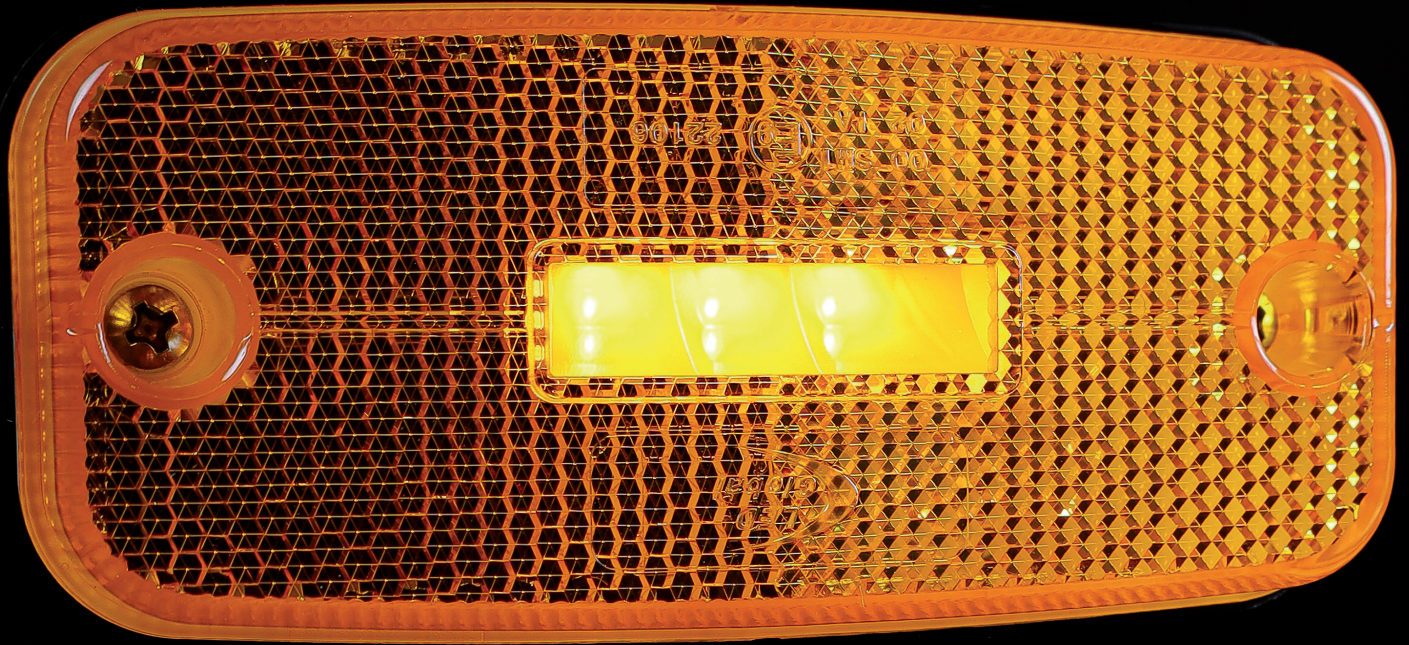

---

# LED

---

## Marker Lights

Enhance visibility and safety with our premium Marker Lights. Designed to clearly define the edges and boundaries of your vehicle or equipment, these lights ensure you're seen in all conditions. With bright, durable LEDs and robust construction, our marker lights offer reliable performance and easy installation. Ideal for trucks, trailers, and machinery, they help prevent accidents and improve nighttime visibility.

# LG777

Red LED Marker Light with Amber Warning Strobe

## Specifications

- 12-24 Volts
- Size: 132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker Light
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67




# LG776

White LED Marker Light with Amber Warning Strobe

## Specifications

- 12-24 Volts
- Size: 132 x 51 x 19mm
- 6 LED for Strobe
- 18 LED for Marker
- 21 Flash patterns
- ECE R10 Approved
- ECE R 65 Approved
- IP67

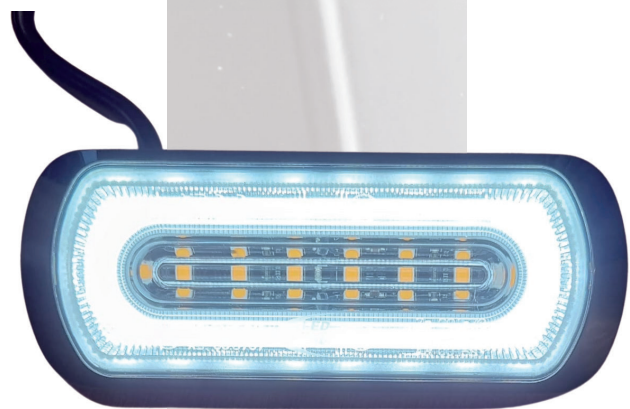

# LG106

## LED Smoked Lens Marker Light

### Specifications

- White Front Position Light
- IP Rating: IP69
- Size: 86mm x 26mm x 12mm
- ECE R10 / ECE R148
- Comes with flat rubber / 0.3 meter cable



IP68



EMC



NEW  
SMOKEDLENS

# LG107

## LED Smoked Lens Marker Light

### Specifications

- Amber Side Marker Light
- IP Rating: IP69
- Size: 86mm x 26mm x 12mm
- ECE R10 / ECE R148
- Comes with flat rubber / 0.3 meter cable



IP68



EMC



NEW  
SMOKEDLENS

# LG108

## LED Smoked Lens Marker Light

### Specifications

- Red Rear Position Light
- IP Rating: IP69
- Size: 86mm x 26mm x 12mm
- ECE R10 / ECE R148
- Comes with flat rubber / 0.3 meter cable



IP68



EMC



NEW  
SMOKEDLENS

## *LG177 White* Neon Style Marker Light

### Specifications

- 12 -24 Volts
- Size 124mm x 49mm x 22mm
- ECE Approved
- IP67
- EMC



12-24V



IP67



EMC

## *LG179 Amber* Neon Style Marker Light

### Specifications

- 12 -24 Volts
- Size 124mm x 49mm x 22mm
- ECE Approved
- IP67
- EMC



12-24V



IP67



EMC

## *LG178 Red* Neon Style Marker Light

### Specifications

- 12 -24 Volts
- Size 124mm x 49mm x 22mm
- ECE Approved
- IP67
- EMC



12-24V



IP67



EMC



## **LG122-123-124 Pair ( White, Amber, Red)** LED Button Marker Light (Supplied as a Pair)

### Specifications

- 10-30 Volts
- Size: 25 x 25 x 25mm
- ECE Approved
- IP 67
- Flush Mounted
- 3 LEDs



## **LG159** 12-36 Volts LED Short Rubber Marker Light

### Specifications

- 12-36 Volts
- Size: Lamp Height: 75 mm, Lamp Base: 88 mm / 35 mm
- ECE Approved
- IP 67
- White & Red Marker Function
- 6 LEDs
- Rubber Housing



## **LG183 ( White, Amber, Red)** LED Oval Marker Light with Removeable Bracket

### Specifications

- 9-33 Volts
- Size: 105 x 65 x 36mm
- ECE Approved
- IP 67
- 2 Mounting Options
- Mirror Reflector Technology



## LG204

### LED Round Fog Light

#### Specifications

12-24 Volts

Fog Function

20 LEDs

ECE R10 Approved

Pre Wired

Size: 140mm x 58mm



## LG214

### LED Round Reverse Light

#### Specifications

12 - 24 Volts

Reverse Function

20 LED's

Rated to IP67

ECE R10 Approved

Working Temperature: -40Cto + 65C

Size: 140mm x 58mm



## LG195

### 9 - 33 Volts LED License Plate Light

#### Specifications

• 9-33 Volts


• Size: 85 x 50 x 30mm

• IP 67

• ECE R10 Approval

• ECE Approvals

• 4 LEDs





## **LG134-135-136** ( White, Amber, Red) LED Rectangular Marker Light with Removeable Bracket

### Specifications


- 9-33 Volts
- Size: 114 x 70 x 18.8mm
- ECE Approved
- IP 67
- 2 Mounting Options
- Mirror Reflector Technology



## **LG104** ( White, Amber, Red) LED Rectangular Marker Light with 6 Diodes

### Specifications


- 10-30 Volts
- Size: 73 x 37 x 30mm
- ECE Approved
- IP 67
- 6 LEDs



## **LG116** ( White, Amber, Red) LED Rectangular Marker Light with 6 Diodes

### Specifications

- 10-30 Volts
- Size: 96 x 20 x 8mm
- ECE Approved
- IP 67
- Super Slim Design
- 6 LEDs



## LG164L - LG164R

LED Rubber stalk marker light

### Specifications

- 12-24 Volts
- Neon Style Light
- White , Red , Amber
- IP67
- E-marked
- EMC




## LG165L - LG165R

LED Rubber Stalk Marker Light with Dynamic indicator

### Specifications

- 12-24 Volts
- Neon Style Light
- Dynamic indicator
- White , Red , Amber
- Size see in pictures
- IP67
- E-marked



# LG205

## 12-24 Volts LED Square Reverse Light

### Specifications

- 12 - 24 Volts
- Size: 88 x 90 x 36mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 30 LEDs
- Reverse Function



12-24V



EMC



x30 LED



IP67



# LG215

## 12-24 Volts LED Square Fog Light

### Specifications

- 12 - 24 Volts
- Size: 88 x 90 x 36mm
- IP 67
- ECE R10 Approval
- ECE Approval
- 30 LEDs
- Fog Function



12-24V



EMC



x30 LED



IP67




## LG185

### 10 - 30 Volts LED Short Interior Strip Light

#### Specifications

- 10-30 Volts
- Size: 270 x 45 x 16.5mm
- Pre Wired
- ECE R10 Approval
- 24 High Quality LEDs
- On/Off Switch



## LG186

### 10 - 30 Volts LED Long Interior Strip Light

#### Specifications


- 10 - 30 Volts
- Size: 570 x 45 x 16.5mm
- Pre Wired
- ECE R10 Approval
- 60 High Quality LEDs
- On/Off Switch





# UPGRADE YOUR LIGHTING

and power up your productivity with LED Global

A photograph of two large trucks at night, illuminated by their own lights. The truck in the foreground is a large dump truck with its bed raised, and it has several bright LED work lights mounted on its side and rear. The truck in the background is a smaller truck, also illuminated. The scene is set in a dark environment, possibly a construction site or a parking lot at night.

At LED Global, we offer a wide range of high-performance lighting solutions designed to enhance visibility, safety, and efficiency for any application. From powerful driving lights to robust work lights and specialized position lights, our products are engineered for durability and exceptional performance.

Whether you're on the road, at a construction site, or working on an outdoor project, trust LED Global to provide the illumination you need to get the job done right.



# LED

## Tail Lighting

Upgrade your vehicle with our advanced Tail Lights, featuring dynamic indicators for a modern, eye-catching look. Available in various shapes to match your style, these tail lights combine sleek design with enhanced functionality. Ensure your vehicle stands out and stays safe with our high-performance tail lights, designed for maximum visibility and reliability.

# LG527

## 12-24 Volts LED Burger Tail Light

### Specifications

- 12-24 Volts
- Size: 140 x 35mm
- Stop Tail & Indicator
- ECE Approved R6, R7
- IP 67
- Slim Housing
- 1 Metre Cable



12-24V



EMC



IP67



DYNAMIC  
INDICATOR



# LG534

## 9-33 Volts LED Burger Tail Light

### Specifications

- 9-33 Volts
- Size: 140 x 58mm
- Stop Tail & Indicator
- ECE Approved R6, R7
- IP 67
- ECE Approved R10
- With spade connectors



9-33V



EMC



IP67



# LG529

## LED Combination Tail Light Pair

### Specifications

- 12-24 Volts
- Size: 106 x 98 x 36mm
- Stop Tail & Indicator
- ECE R10 Approved
- IP 67
- ECE R3 R6 R7
- Supplied as a Pair



12-24V



EMC



IP67



ECE R10

# LG556 -7.5M Cable / LG557 - 12 M Cable

## Magnetic LED Trailer Lights Kit

### Specifications

- 12 - 24 Volts
- Magnetic Base Lighting
- Stop Tail, Indicator & License Plate
- ECE Approved
- IP 67
- Prewired with 7 Pin Trailer Plug



12-24V



EMC



IP67



ECE R10



Magnetic





# LG505

## Rechargeable Magnetic LED Tail Light Kit

Featuring powerful LEDs and a convenient magnetic base, this kit ensures superior visibility and quick, hassle-free attachment. With its rechargeable battery, you can rely on long-lasting performance and easy maintenance.



12-24V



EMC



IP67



ECE R10




Magnetic



UNIVERSAL

### Specifications

- 12 - 24 Volt
- Wireless Signal from Car to Lights
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7
- 2.5 Hours Charging Time
- 8 Hours Working Time on full battery
- Magnetic or Clip on Mounting
- Neon Tail Light
- Dynamic Indicator
- Stop, Tail, Indicator



## LG526

### 6 LED Slim Combination Tail Light

#### Specifications

- 12-24 Volts
- Size: 131 x 31 x 6.6mm
- Stop Tail & Indicator
- ECE R10 Approved
- IP 67
- ECE R148
- Can be fitted using 3M Adhesive Strip




## LG530

### 9-33 Volts LED Slim Tail Light Pair

#### Specifications

- 9-33 Volts
- Size: 259 x 46 x 17mm
- Stop Tail & Indicator
- ECE Approved
- IP 67
- Supplied as a Pair
- 2 Mounting Options
- Flush Mount gasket or surface mounted Bracket

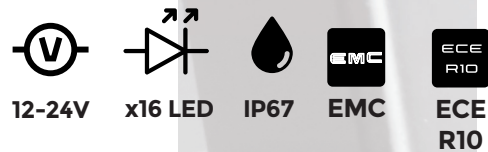


## LG550 -12M Cable / LG551 - 8 M Cable

### 4 Foot LED Trailer Board with Fog Light

#### Specifications

- 12-24 Volts
- Size: 1200 mm Long
- IP 67
- Stop Tail Indicator License Plate & Fog
- ECE R10 Approved
- ECE R3 R6 R7
- Pre Wired with 7 Pin Trailer Plug



# LG533

## 9-33 Volts LED Combination Light Pair

### Specifications

- 9-33 Volts
- Size:150 x 80 x 21.4mm
- IP 67
- Stop, Tail, Indicator & Reflector
- ECE Approved R3, R6, R7
- ECE R10 Approved
- Supplied as a Pair



9-33V



IP67



EMC



ECE  
R10



# LG512

## 10-30 Volts LED Combinaton Tail Light

### Specifications

- 10-30 Volts
- Size: 205 x 95 x 28mm
- IP 67
- Stop, Tail & Indicator
- ECE Approved R3, R6, R7
- ECE R10 Approved
- 72 LEDs
- 1 Metre Cable



10-30V



IP67



EMC



ECE  
R10




## **LG574 - Left / LG575 - Right**

9-33 Volts LED Rectangular Combination Light

### Specifications

- 9-33 Volts
- Size: 256 x 130 x 40.5mm
- IP 67
- Stop, Tail, Indicator, Fog, Reverse & Triangle
- 45 LEDs
- ECE Approved R3, R6, R7, R23, R38
- ECE R10 Approved
- Built in Smart Resistor on Indicators
- Supplied with Plug & Socket with 60cm Cable





## **LG554 - Left / LG555 - Right**

10-30 Volts LED Combination Trailer Light

### Specifications

- 10-30 Volts
- Size: 316 x 130 x 31mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23, R38
- Supplied with 1.5 Metre Cable
- Stop, Tail, Indicator, Fog, Reverse, Reflector

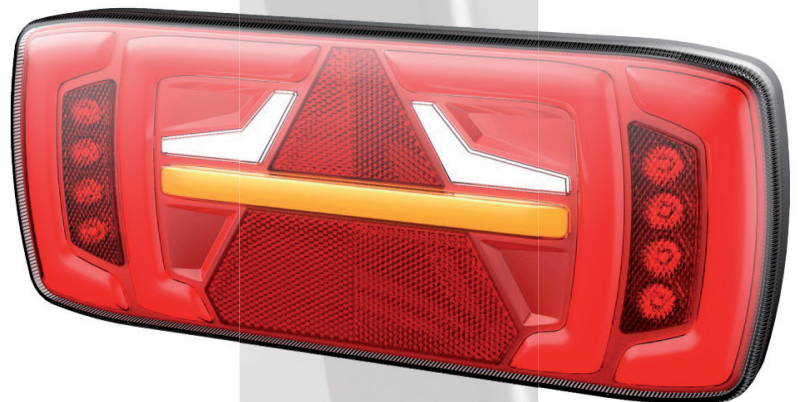

# LG504

## 10-30 Volts LED Combination Tail Light

### Specifications

- 10-30 Volts
- Size: 272 x 100 x 27.4mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7
- Supplied with 1.5 Metre Cable
- 27 LEDs
- Stop, Tail & Indicator



10-30V



EMC



x27 LED



IP67



INDICATOR

STOP & TAIL

STOP & TAIL

# LG507

## 10-30 Volts LED Combination Tail Light

### Specifications

- 10-30 Volts
- Size: 272 x 100 x 27.4mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23
- Supplied with 1.5 Metre Cable
- Stop, Tail, Indicator & Reverse



10-30V



EMC



IP67



INDICATOR

STOP & TAIL


REVERSE

## LG528

LED Universal Combination Tail Light with Dynamic Indicator

### Specifications

- 9-30 Volts
- Size: 284 x 100 x 32mm
- IP 67
- ECE R10 Approval
- ECE R3, R6, R7, R23, R38
- Supplied with 50 cm Cable
- Stop, Tail, Indicator, Fog, Reverse, Reflector

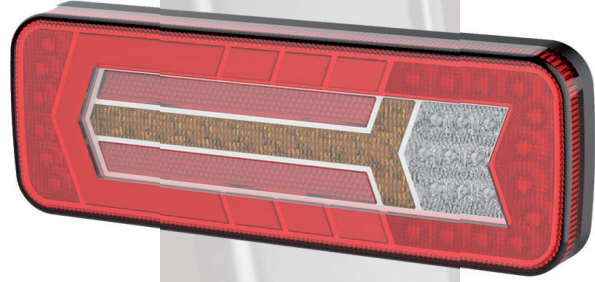

9-30V



EMC



IP67




DYNAMIC INDICATOR

## LG565 - Left / LG566 - Right

9-33 Volts LED Trailer Combination Light

### Specifications

- 9-33 Volts
- Size: 375 x 130 x 33mm
- IP 68
- ECE R10 Approval
- ECE R3, R4, R6, R7, R23, R38, R91
- 7 Pin Socket on Back of Light
- Stop, Tail, Indicator, Fog, Reverse, Reflector
- Supplied with 7 Pin Plug & 1 Metre Cable
- Built in Smart Resistance on Indicators

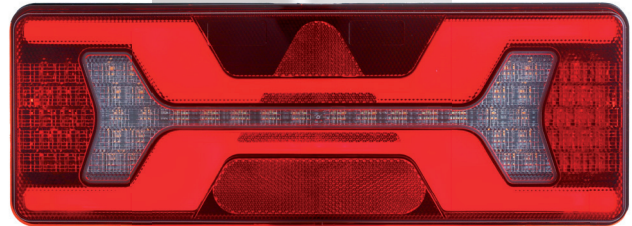

9-33V



EMC



IP68




DYNAMIC INDICATOR

## LG552 - Left / LG553 - Right

24 Volt LED Combination Truck Tail Light

### Specifications

- 24 Volts
- Size: 486 x 130 x 70mm
- IP 68
- ECE R10 Approval
- ECE R3, R4, R6, R7, R23, R38, R91
- 7 Pin Socket on Side of Light
- Stop, Tail, Indicator, Fog, Reverse, Side Light, License Plate Light, Reflector
- Supplied with 7 Pin Plug & 1 Metre Cable

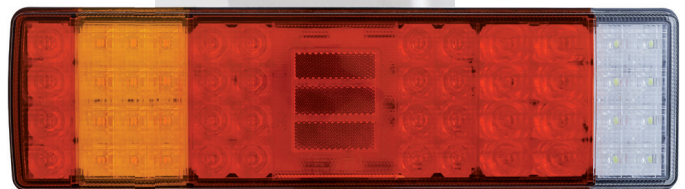

24V



EMC



IP68

# LG570 - Left / LG571 - Right

## 9-33 Volts LED Triangular Combination Light



9-33V



EMC



IP67



DYNAMIC  
INDICATOR

### Specifications

- 9-33 Volts
- Size: 218 x 145 x 35mm
- IP 67
- Stop, Tail, Indicator, Fog, Reverse & Triangle
- ECE Approved R3, R6, R7, R23, R38
- ECE R10 Approved
- 45 LEDs
- Built in Smart Resistor on Indicators




# LG576

## Complete Plug & Play LED Trailer Light Kit

### Whats Included

- Complete Plug & Play Cable System
- LED Combination Trailer Light Pair
- LED License Plate Light
- 7 to 13 Pin Adaptor Plug
- Plug Holder

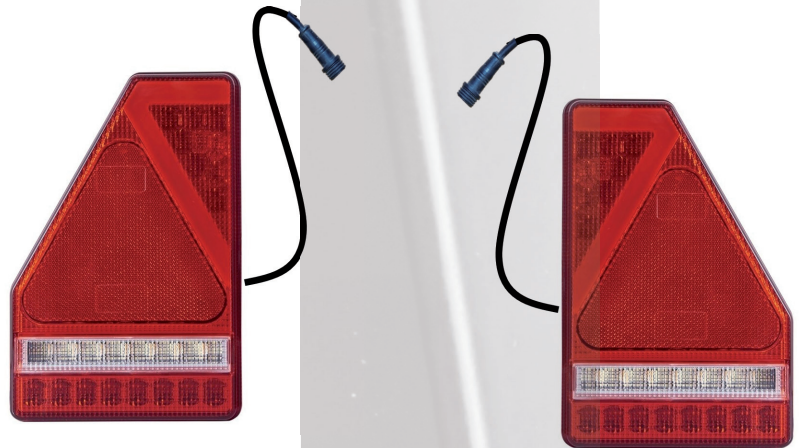

### How it Works

13 Pin Plug wired with 1.8 Metre cable to 7 Pin Connector & 2 Pin PRS

7 Pin Connector with 2.5 Metre Cable to 3 way Splitter

3 Way Splitter is 6 Pin to Left Lamp, 6 Pin to Right Lamps & 2 Pin connector to License Plate Light

Left Light has Plug & Play with 50cm Cable to Splitter

Right Lamp has Plug and Play with 150cm Cable to Splitter

License Plate has Plug & Play Connector with 50cm Cable to Splitter





# LED

## Bulbs

Illuminate your world with our Professional Bulbs, designed for superior brightness and longevity. Engineered to meet the highest standards, these bulbs offer exceptional clarity and performance across a variety of applications. Whether for automotive, industrial, or specialized use, our professional-grade bulbs deliver consistent light output and reliability.



# LG5080

## H4 LED Bulb Kit

### Specifications

- 12 - 24 Volts
- 50 Watt (Each Bulb)
- 4000 Lumen per Bulb
- High & Low Beam
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Excellent Beam Pattern
- Copper PCB with fast heat conduction
- Vehicle Spec LED



# LG5082

## H7 LED Bulb Kit

### Specifications

- 12 - 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H7 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Excellent Beam Pattern
- Copper PCB with fast heat conduction
- Vehicle Spec LED



# LG5086

## 880/881 LED Bulb Kit

### Specifications

- 12 - 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- 880/881 LED
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction



25W



12-24V



2000  
LUMENS



EMC



# LG5088

## H1 LED Bulb Kit

### Specifications

- 12 - 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H1 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction



25W



12-24V



2000



EMC



# LG5084

## H11 LED Bulb Kit



Upgrade your vehicle's lighting with the H11 LED Bulb Kit. Engineered for superior brightness and clarity, these bulbs deliver a crisp, white light that enhances visibility and safety on the road.



### Specifications

- 12 - 24 Volts
- 25 Watt (Each Bulb)
- 2000 Lumen per Bulb
- H11 Bulb
- Long Lifetime
- High Quality Fan
- EMC & EMI
- Copper PCB with fast heat conduction





**LED**

## Torches & Hand Lights

Illuminate your path with our high-performance torches, engineered for reliability and brightness in any situation. Whether you're exploring the great outdoors, working in low-light conditions, or simply need a dependable light source, our torches deliver powerful illumination and durability.


## LG910

Rechargeable LED Flood Work Light



### Specifications

- 10 Watt Cob LED
- USB Charging Cable
- Built in Power Bank
- Battery Life Indicator
- 750 Lumens
- 3 Modes Of Light




## LG908

Rechargeable LED Hat



### Specifications

- Integrated LED Rechargeable Lamp
- USB Charging
- 4 x SMD LEDs
- 3 x Light Intensity Levels
- Light can be detached from Hat



## LG912

Rechargeable LED Head Torch



### Specifications

- LED Rechargeable Torch
- USB Charging Cable
- Flexible Head Band
- PIR Sensor
- Long Distance Beam
- 3 Modes Of Light




## LG907

LED Rechargeable Warning Flare



### Specifications

- LED Rechargeable Flare
- USB Charging Cable
- 12 Amber LEDs
- 9 Flash Patterns
- Magnetic
- Waterproof
- Impact Resistant



# LG901

## Rechargeable LED Mechanics Inspection Lamp

### Specifications

- Rechargeable
- 8 + 1 LEDs
- Magnetic Base
- Flexible Base
- SMD LED
- Supplied with 3 Pin UK Charger Plug & USB Cable
- Long lasting Battery



# LG913

## Rechargeable LED Hand Torch with Power Bank

### Specifications

- LED Rechargeable Torch
- USB Charging Cable
- Magnetic Base
- 4 X Zoom Modes
- Power Bank Built in for Charging Phones
- Long Distance Beam
- Aluminium Housing



# LG903

## Magnetic Rechargeable LED Mini Hand Torch

### Specifications

- Rechargeable LED Hand Lamp
- USB Charging Cable
- Magnetic Base & Hanging Hook
- 350 Lumen ( Front)
- 70 Lumen (Top)
- 180 Degree Adjustable
- Battery Indicator
- Long lasting Battery



A large combine harvester is shown from a front-facing perspective, operating in a field of golden-brown crops. The harvester's headlights are on, creating a bright glow against the dim, twilight sky. The machine's complex structure, including the grain tank and various mechanical components, is visible. The foreground is filled with the texture of the harvested grain.

**LED Global** offers an extensive array of lighting and safety products tailored for the Agriculture, Automotive, Construction Equipment, Forestry, and Mining industries.



# LED GLOBAL

## Camera Systems

Elevate your vehicle's safety and performance with our state-of-the-art Camera Systems. Our solutions offer crystal-clear imaging and reliable functionality, ensuring you have a comprehensive view of your surroundings. Each system includes a high-definition monitor and a robust camera designed for various driving conditions. With features like night vision and wide-angle lenses, you can confidently navigate even in low-light situations. Easy to install and designed for durability, our Camera Systems provide peace of mind and enhanced visibility on every journey.





# LG9001

## 7" AHD Rear View Wired Camera System



### Whats included:

The Camera System includes a 7" AHD monitor with 2 channel input, mounted using a fan bracket.

A 20 metre 4 pin connector extension lead is supplied to connect the monitor to the camera.

There is one heavy duty

1080P resolution camera included with 4 Pc SMT lights for night vision.

### Monitor Specifications

- 7" Monitor (Diagonal)
- Aspect Ratio 16:9
- 12-24 Volt Power Supply
- 2 Way Video Input
- OSD Menu
- Supports both AHD & CVBS Input
- 1024 x RGB x 600 Resolution
- Supplied with an adjustable Fan Bracket
- Heavy Duty Housing
- 4 Pin GX12 Connector

### Camera Specifications

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- 4 Pin Connector
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate
- Heavy Duty Housing
- Night Vision

# LG9045

## 7" AHD Wireless Rear View Camera System



**Whats included:**

The Camera System includes a 7" AHD monitor with 4 channel input, with wireless sync technology, mounted using a choice of U shape bracket or flexible suction cup bracket.

There is one heavy duty 1080P resolution wireless camera included with 4 Pc SMT liights for night vision.

**Monitor Specifications**

- 7" Montor (Diagonal)
- Aspect Ratio 16:9
- 12-24 Volt Power Supply
- 4 Way Video Input
- Recording
- 1024 x RGB x 600 Resolution
- U Shape or Suction Cup Bracket
- Heavy Duty Housing
- Touch Buttons with Dim lighting
- Built in Speaker

**Camera Specifications**

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- Wireless Technology
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate
- Heavy Duty Housing
- Night Vision

## LG9004

AHD Rear View Camera



### Specifications

- Resolution 1080P
- Night Vision
- 4 Pin Connector
- IP69K
- 120 Degrees Wide Angle
- AHD Camera

## LG9046

Wireless AHD Camera to suit LG9045



### Specifications

- Resolution: 1080P
- Effective Pixels: 1920 x 1080
- IP69K Waterproof Rating
- Wireless Technology
- 4 Pieces of SMT LEDs
- AHD
- 120 Degrees Wide Angle View
- 30 FPS Frame Rate

## LG9030

Trailer Wiring Kit for Camera System




### Specifications

- 3 Metre Suzie Coiled Cable
- 4 Pin Connector to suit system Connectors
- Waterproof Connection
- Stainless steel connector ports

## LG9009

Fan Bracket for Monitor

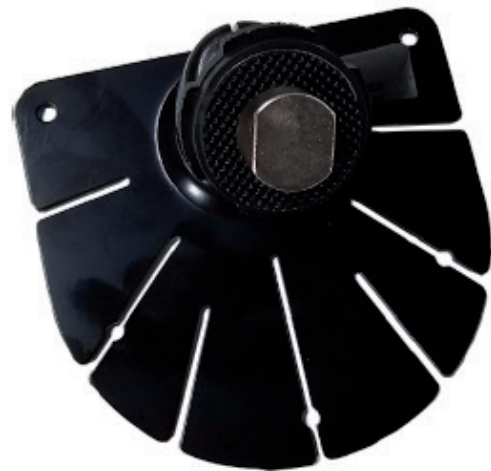

## **LG9003**

20 Metre Cable with 4 Pin Connectors



## **LG9002**

10 Metre Cable with 4 Pin Connectors



## **LG9025**

Wireless Aerial to suit Monitor & Camera

Suitable for LG 9045 Camera Kit



## **LG9024**

Extension Wireless Antenna to suit Camera

Suitable for LG 9045 Camera Kit





---

# LED

---

## Parts & Equipment

Discover our extensive selection of high-quality Parts & Equipment, designed to meet the demands of various industries and applications. From essential components to specialized tools, we offer a wide range of products to ensure optimal performance and reliability.

**LG1352**



**7 Pin Aluminium Trailer Plug**

**LG1353**



**7 Pin Plastic Trailer Plug**

**LG1355**



**7 Pin Aluminium Socket for Vehicles**

**LG1356**



**7 Pin Plastic Socket for Vehicles**

**LG1351**



**13 Pin Plastic Trailer Plug**

**LG1375**



**13 Pin Plastic Socket for Vehicles**

**LG1358**



**7 Pin Plastic Plug Extension Suzie Lead**

**LG1359**



**7 Pin Socket with Plate & Cable**

**LG1360**



**7 Pin to 13 Pin Adaptor**

**LG1354**



**13 Pin to 7 Pin Adaptor**

**LG1350**



**7 Pin Socket Extension Plug**

**LG1357**



**Red Trailer Plug Holder**

## **LG1370**



3 Pin Plastic Plug

## **LG1371**



3 Pin Plastic Socket

## **LG940**



License Plate Bracket for mounting Light Bars

## **LG1900**

50 Sq Heavy Duty Booster Cables



### Specifications

- 50 sq/mm CCA
- 4 Metre red and black Cables
- Heavy Duty clamp
- Supplied in zip carrier bag

## **LG8000 (12 Volt)**

## **LG8002 (24 Volt)**

Fuel Transfer Pump



### Specifications

- 12 Volt or 24 Volt Version Available
- 40 Litres per minute
- 2800 RPM Motor
- Manual Gun
- Supplied with 2.5 metre of suction hose.
- 4 metre Feed Hose
- Suitable for kerosene + diesel



## Contact us

### Ireland / UK Office:

Unit 1 Castlesampson  
Athlone  
Co. Roscommon  
Ireland  
N37 N821  
Tel: +353 90 9683018  
sales@led-global.com

### European Office:

Wilhelm Röntgen Straße 9  
63477 Maintal  
(Frankfurt)  
Germany  
Tel: +49(0)6181 702 3778  
info@led-global.com



**Authorized Dealer Stamp**

2025

www.led-global.com



for the Agriculture, Automotive, Construction  
Equipment, Forestry, and Mining sectors